NOTICE OF MEETING

CITY OF PACIFIC GROVE

PLANNING COMMISSION

REGULAR MEETING AGENDA

Thursday, January 9, 2020, 6:00 P.M.

Council Chamber – City Hall – 300 Forest Avenue, Pacific Grove, CA

AGENDA

CALL TO ORDER

1. APPROVAL OF AGENDA

2. COMMISSION AND STAFF ANNOUNCEMENTS (City-Related Items Only)

3. COUNCIL LIAISON ANNOUNCEMENTS

4. GENERAL PUBLIC COMMENT

General Public Comment must deal with matters subject to the jurisdiction of the City and the Planning Commission that are not on the Regular Agenda. This is the appropriate place to comment as to items on the Consent Agenda, only if you do not wish to have the item pulled for individual consideration by the Planning Commission. Comments from the public will be limited to three minutes and will not receive Planning Commission action. Comments regarding items on the Regular Agenda shall be heard prior to Planning Commission's consideration of such items at the time such items are called. Whenever possible, written correspondence should be submitted to the Planning Commission in advance of the meeting, to provide adequate time for its consideration.

CONSENT AGENDA

The Consent Agenda deals with routine and non-controversial matters, and may include action on resolutions, ordinances, or other public hearings for which testimony is not anticipated. The vote on the Consent Agenda shall apply to each item that has not been removed. Any member of the Planning Commission, staff, or the public may remove an item from the Consent Agenda for individual consideration. When items are pulled for discussion, they will be automatically placed at the end of their respective section within the Regular Agenda. One motion shall be made to adopt all non-removed items on the Consent Agenda. Items pulled from this section will be placed under 6. Regular Agenda

5. A. Approval of Minutes of the December 19, 2019, PC Regular Meeting

Recommendation: Approve minutes.

Reference: Alex Othon, Assistant Planner

CEQA Status: Does not constitute a "Project" as defined by CEQA Guidelines Section 15378

REGULAR AGENDA

6. PUBLIC HEARINGS

For public hearings involving a quasi-judicial determination by the Planning Commission, the proponent of an item may be given 10 minutes to speak and others in support of the proponent's position may be given three minutes each. A designated spokesperson for opposition to the item may be given 10 minutes to speak and all others in opposition may be given three minutes each. Very brief rebuttal and surrebuttal may be allowed in the sole discretion of the Planning Commission. In public hearings not involving a quasi-judicial determination by the Planning Commission, all persons may be given three minutes to speak on the matter. Public hearings on non-controversial matters or for which testimony is not anticipated may be placed on the Consent Agenda, but shall be removed if any person requests a staff presentation or wishes to be heard on the matter.

A. Use Permit for 1305 Funston Ave. (UP 19-0546)

Recommendation: Discuss and approve the Use Permit subject to findings, conditions of approval and a Class 3, Section 15303(e) CEQA exemption

Reference: Alex Othon, Assistant Planner

CEQA Status: Exempt per CEQA Guidelines per Section 15303(e) – Conversion of Small Structures

B. Amendments to 23.80 - Accessory Dwelling Units
Recommendation: Discuss and provide a recommendation to City Council
Reference: Alyson Hunter, Senior Planner
CEQA Status: Statutorily exempt per Section 15282(h) of the CEQA Guidelines

C. Preliminary Discussion on Zoning Code Amendment to Reduce Multi-Family Development Permit Requirements
Recommendation: Receive as information, discuss, and provide staff guidance.
Reference: Alex Othon, Assistant Planner
CEQA Status: Does not constitute a "Project" as defined by CEQA Guidelines Section 15378.

D. Formation of a Planning Commission Advisory Group to Discuss and Provide Recommendation on Reducing Minimum Lot Sizes as a Way to Increase Housing Opportunities
Recommendation: Assign a 3-member Advisory Group, specify the goal(s) of the group, and designate the timeframe to report back to the Commission with recommendations.
Reference: Alyson Hunter, Senior Planner
CEQA Status: Does not constitute a "Project" as defined by CEQA Guidelines

Section 15378

7. REPORTS AND DISCUSSION ITEM(S)

A. Planning Commission's Annual Report for 2019

Next Meeting – February 13, 2020.

ADJOURNMENT

NOTICE OF ADA COMPLIANCE: Pursuant to Title II of the Americans with Disabilities Act (Codified At 42 United States Code Section 12101 and 28 Code of Federal Regulations Part 35), and Section 504 of the Rehabilitation Act of 1973, the City of Pacific Grove does not discriminate on the basis of race, color, religion, national origin, ancestry, sex, disability, age or sexual orientation in the provision of any services, programs, or activities. The City of Pacific Grove does not discriminate against persons with disabilities. City Hall is an accessible facility. A limited number of assisted listening devices will be available at this meeting. Notification 48 hours prior to the meeting will enable the City to make reasonable arrangements to ensure accessibility to this meeting or provide the requested agenda format.

Item No. 5A

12-19-19 Planning Commission Minutes

DRAFT MINUTES

CITY OF PACIFIC GROVE

PLANNING COMMISSION

REGULAR MEETING

6:00 p.m., Thursday, December 19th, 2019
Council Chambers – City Hall – 300 Forest Avenue, Pacific Grove, CA

CALL TO ORDER

- Commissioners Present (7): Robin Aeschliman, Bill Bluhm, Jeanne Byrne, Mark Chakwin (Secretary), William Fredrickson, Steven Lilley (Vice-Chair), Donald Murphy (Chair**)**

1. APPROVAL OF AGENDA

On a motion by Commissioner Byrne, seconded by Commissioner Bluhm, the Commission voted 7-0 to approve the Agenda. Motion Passed.

2. COMMISSION AND STAFF ANNOUNCEMENTS (City-Related Items Only)

(Please refer to the Video Recording for details)

- Chair Murphy provided an update on the most recent City Council actions and highlighted the issues that the Council is working on now and in the future. He noted that the first reading of the wireless ordinance was passed by the City Council on December 18th and was continued for a second reading and adoption on January 15, 2020. Additionally, the Council ratified the City Manager's decision to reduced Planning Commission meetings to once a month, on the second Thursday.

- Commissioner Chakwin noted that in December the FCC reaffirmed its standards on cellular radiation as it relates to local regulatory authority.

3. COUNCIL LIAISON ANNOUNCEMENTS

None

4. GENERAL PUBLIC COMMENT

The Chair opened the meeting to public comment

(Please refer to the Video Recording for details)

- Lisa Ciani thanked the Planning Commission for its work and expressed disappointment that Planning Commission would only meet once a month given the workload that the new LCP would provide in 2020.

The Chair closed the meeting to public comment

CONSENT AGENDA

5. A. **Approval of Minutes of the December 5, 2019, PC Regular Meeting**
Recommended Action: Approve minutes.
Reference: Alex Othon, Assistant Planner
CEQA Status: Does not constitute a "Project" as defined by CEQA Guidelines Section 15378.

On a motion by Commissioner Chakwin, seconded by Commissioner Bluhm, the Commission voted 7-0 to approve the Consent Agenda. Motion passed unanimously.

REGULAR AGENDA

6. A. **Prezone of 801 Sunset Drive to Light Commercial (C-1)**
Recommendation: Make a recommendation of approval of the proposed zoning map amendment to the City Council.
Reference: Alyson Hunter, Senior Planner
CEQA Status: Does not constitute a "Project" as defined by CEQA Guidelines

- Commissioner Chakwin disclosed that he lived 601 feet away from the 801 Sunset Drive property but that he has no interests that could be benefited by this hearing, and stated that he believed that he did not need to recuse himself from the issue.

(Please refer to the Video Recording for details)

Senior Planner Alyson Hunter provided a briefing and answered questions.

(Please refer to the Video Recording for details)

The Chair opened the item to public comment.

(Please refer to the Video Recording for details)

(out of sequence public comment)*

- Brandon Swanson, Interim Chief of Planning for Monterey County, provided brief context from the County Staff's perspective.

(Please refer to the Video Recording for details)

The Chair closed the meeting to public comment

The Commission discussed the issue.

(Please refer to the Video Recording for details)

On a motion by Commissioner Byrne, seconded by Commissioner Fredrickson, the Commission voted (7-0) to approval of the proposed zoning map amendment and to accept all Staff Findings and to forward the item to the City Council for consideration. Motion Passed.

B. **Map Amendment to Rezone the Asilomar State Park & Conference Grounds to Open Space ("O")**
Recommendation: Make a recommendation of approval of the proposed zoning map amendment to the City Council.
Reference: Alyson Hunter, Senior Planner
CEQA Status: Does not constitute a "Project" as defined by CEQA Guidelines Section 15378

On a motion by Chair Murphy, seconded by Commissioner Byrne, the Commission voted (7-0) to continue this item to a date uncertain. Motion passed unanimously.

DISCUSSION ITEMS

7A. Amendments to 23.80 - Accessory Dwelling Units
Recommendation: Discuss and provide recommendation to City Council.
Reference: Anastazia Aziz, AICP, Community Development Director
CEQA Status: Does not constitute a "Project" as defined by CEQA Guidelines Section 15378

Senior Planner Hunter answered questions about the item
(Please refer to the Video Recording for details)

Then the Commission briefly discussed the item.
(Please refer to the Video Recording for details)

On a motion by Commissioner Chakwin, seconded by Vice Chair Lilley, the Commission voted (7-0) to continue this item to the January 9th meeting. Motion passed unanimously.

B. **Conceptual Review – Reducing Minimum Lot Sizes** (please refer to 12/05/19 packet for background information)
Recommendation: Receive as information, discuss and provide staff direction.
Reference: Anastazia Aziz, AICP, Community Development Director
CEQA Status: Does not constitute a "Project" as defined by CEQA Guidelines Section 15378

(Please refer to the Video Recording for details)
The Chair recapped the key points from the previous meeting's consideration of this item. Then the Commission discussed the issue and provided additional guidance to Staff on the item.

ADJOURNMENT

The Chair adjourned the meeting at 6:58 p.m.

The next meeting is scheduled for January 9th, 2020

APPROVED BY THE PLANNING COMMISSION

_____ _____
Mark Brice Chakwin, Secretary Date

Item No. 6A

Use Permit (UP) Application No. 19-0546 for 1305 Funston Ave

CITY OF PACIFIC GROVE

300 Forest Avenue, Pacific Grove, California 93950

AGENDA REPORT

TO:	Chair Murphy and Members of the Planning Commission
FROM:	Alex Othon, Assistant Planner
MEETING DATE:	January 9, 2020
PERMIT APPLICATION NO.:	Use Permit (UP) Application No. 19-0546
LOCATION:	1305 Funston Ave. Pacific Grove, CA 93950 (APN 007-567-016)
SUBJECT:	Legalize an existing second accessory structure over 70 sq. ft. with existing plumbing facilities
APPLICANT:	Xia Cui (Owner)
ZONING/LAND USE:	Residential Single-Family (R-1) / Residential Medium Density (9.7 du/ac)
CEQA:	Categorical Exemption, Section 15303(e), Class 3, Conversion of Small Structures

RECOMMENDATION

Approve the project subject to the recommended findings, conditions of approval, and a Class 3, Section 15303 (e) CEQA exemption for the Conversion of Small Structures.

PROJECT DESCRIPTION

The proposed project consists of the legalization of an existing 196 sq. ft. accessory structure with plumbing. A Use Permit is required to allow a second accessory structure over 70 sq. ft., and to allow plumbing fixtures in a detached accessory structure per PGMC 23.64.180.

BACKGROUND

Site Description

The property is approximately 4,692 sq. ft. in size and is currently developed with a single-story single-family residence, a 420 sq. ft. ADU, and two accessory structures consisting of a 120 sq. ft. shed and a 196 sq. ft. garage.

Surrounding Land Uses
The property is located in a neighborhood that consists of similarly sized lots, with single-family residences. The neighborhood consists of fairly narrow streets with no sidewalks. The construction of in-fill sidewalk is not required for this project.

DISCUSSION

Applicable General Plan Policies
The Pacific Grove General Plan provides a framework for future growth and development within the City. The Land Use Element includes goals and polices that call for the orderly, well-planned, and balanced development, consistent with the historic nature of Pacific Grove, the capacity of the City's infrastructure, and ability to assimilate new growth. This residential project helps the City achieve several of its housing goals as stated in the General Plan and is in compliance with the Residential Medium Density land use designation.

Applicable Zoning Code Regulations
General Plan policies are implemented through the R-1 zoning district which allows single-family residential development and accessory structures and uses in areas with adequate public services.

The proposed project is in full compliance with the zoning regulations set forth in PGMC 23.16. This includes and is not limited to the height limit, setback requirements, gross floor area and allowable building coverage. The project will bring the property into compliance with the parking standards for single-family residential development in PGMC Section 23.16.070 which requires one covered and one uncovered parking spaces. By reverting the accessory structure back into a garage, the residence will provide a one-car garage and space for one additional vehicle in the driveway.

The subject site has a maximum allowed site coverage of 2,815 sq. ft. Currently the total site coverage is 3,100 sq. ft., however, per PGMC 23.08.020, 400 sq. ft. of a driveway may be exempt from the site coverage measurement. This brings the property's site coverage to a total of 2,700 sq. ft., which conforms to the requirements of the code.

Architecture and Design Consideration
With the exception of the proposed one-car garage door, no other exterior alterations are proposed.

CALIFORNIA ENVIRONMENTAL QUALITY ACT (CEQA)

The proposed project is found to be exempt under the CEQA Guidelines Categorical Exemption, Section 15303(e), Class 3, Conversion of Small Structures.

Class 3 consists of construction and location of limited numbers of new, small facilities or structures; installation of small new equipment and facilities in small structures; and the conversion of existing small structures from one use to another where only minor modifications are made in the exterior of the structure.

This Class of exemption is subject to exceptions from the exemption under 15300.2 of the CEQA Guidelines pertaining to location, cumulative impacts, significant effects, scenic highways, hazardous waste sites, and historical resources. Staff finds that none of these exceptions applies and that the proposed project qualifies for the Class 3 exemption.

ATTACHMENTS

1. Application
2. Draft Permit
3. Notice of Exemption
4. Plans

RESPECTFULLY SUBMITTED:

Alex Othon
Assistant Planner

CITY OF PACIFIC GROVE

Community Development Department – Planning Division
300 Forest Avenue, Pacific Grove, CA 93950
Tel: 831.648.3190 • Fax: 831.648.3184 • www.cityofpacificgrove.org/cedd

Permit Application

Application # AUP 19-0546
Date: 8/29/19
Total Fees: $1630.70

APPLICANT/OWNER:

Project Address: 1305 Funston Ave, Pacific Grove **APN:** 007567016000

Project Description: Obtaining permits for two existing accessory structures, legalizing (1) a storage shed (2) a garage.

Will the project create, add, or replace impervious surface? ☐ Yes ☑ No

Will the project impact any tree(s) on site? ☐ Yes ☑ No

Applicant		Owner	
Name:	Xia Cui	Name:	Xia Cui
Phone:	(831) 224-3628	Phone:	Same as applicant
Email:	cuiwendy8@gmail.com	Email:	"
Mailing Address:	1319 Lawton Ave Pacific Grove, CA 93950	Mailing Address:	"

PLANNING STAFF USE ONLY:

Permit Request:

☐ CRD: Counter Determination	☐ SP: Sign Permit	☐ IHS: Initial Historic Screening	☐ VAR: Variance
☐ AP: Architectural Permit	☐ UP: Use Permit	☐ HPP: Historic Preservation	☐ MMP: Mitigation Monitoring
☐ AAP: Administrative AP	☑ AUP: Administrative UP	☐ A: Appeal	☐ Stormwater Permit
☐ ADC: Arch Design Change	☐ ADU: Acc. Dwelling Unit	☐ TPD: Tree Permit W/ Dev't	☐ Other:
☐ ASP: Admin Sign Permit	☐ LLA: Lot Line Adjustment	☐ EIR: Environmental Impact	☐ Other:

CEQA Determination:
☑ Exempt
☐ Initial Study & Mitigated Negative Declaration
☐ Environmental Impact Report

Review Authority:
☑ Staff ☐ HRC
☐ ZA ☐ PC
☐ SPRC ☐ CC
☐ ARB ☐ _____

Active Permits:
☐ Active Planning Permit
☐ Active Building Permit
☐ Active Code Violation
Permit #: _____

Overlay Zones:
☐ Butterfly Zone
☐ Coastal Zone
☐ Area of Special Biological Significance (ASBS)
☐ Environmentally Sensitive Habitat Area (ESHA)

Property Information
Lot: 3 Block: 20 Tract: Del Monte Park
ZC: R-1 GP: Med. Density Residential Lot Size: 4,692 ±
☐ Historic Resources Inventory ☐ Archaeologically Sensitive Area

Staff Use Only:
Received by: AO
Assigned to:

RECEIVED
AUG 29 2019
CITY OF PACIFIC GROVE
COMMUNITY DEV DEPT

$ PAID
1630.70
8-29-19

Application # AUP 19-0596

INDEMNIFICATION CONDITION

In consideration for City review and approval of application in this matter, the Owner/Applicant shall indemnify, defend, protect and hold harmless the City, its elected and appointed officials, officers, agents, and employees (collectively "Indemnitees"), using counsel approved in writing by the City, from and against, any and all liabilities, claims, actions, causes of action, proceedings, suits, damages, judgments, liens, levies, costs and expenses of whatever nature, including reasonable attorneys' fees and disbursements which may accrue against Indemnitees by reason of the City's processing, approval or denial of the request and application in this matter. Indemnification shall include, but shall not be limited to any action, or proceeding brought to attack, set aside, void, annul, limit, or inhibit the approval of the application referenced above, and shall expressly include causes of action under the California Environmental Quality Act (CEQA), or the National Environmental Policy Act (NEPA).

The obligation to indemnify shall include, but not be limited to, all costs relating to preparing administrative records, investigations, responses to discovery, retention of experts, and other costs, including attorney's fees or obligations related to this matter, including actions brought by the Owner/Applicant and also extend to any expense incurred in establishing the City's right to indemnification. City expenses shall be paid by Owner/Applicant upon City request notwithstanding final disposition of the matter has not yet occurred. If the City is later determined to not be entitled to indemnification, the City shall repay amounts so advanced.

This indemnification condition is the Owner/Applicant's inducement to the City to process and approve the application, which approval would otherwise be withheld by City due to its concern for liability or expense that may result from performance of the City's duties. Should any dispute arise regarding interpretation of this condition, the prevailing party shall recover all reasonable costs incurred, including court costs, attorney fees and related expenses. Recovery of expenses shall be as additional costs awarded to the prevailing party, and shall not require initiation of a separate legal proceeding.

This indemnification condition shall not require the Owner/Applicant to indemnify the City or other Indemnities: (a) to the extent that an obligation is actually paid by an insurer pursuant to an insurance policy; (b) in connection with any remuneration paid to the City, if it shall be finally adjudged that such remuneration was in violation of law; or (c) on account of the City's misconduct if such misconduct shall be finally adjudged to have been knowingly fraudulent, deliberately dishonest or willful.

Any permit or other approval given by the City to the Owner/Applicant Guarantor shall be valid only so long as this indemnification condition is given full force and effect. If this indemnification condition is revoked, the permit or other approval of the City shall then become null and void.

Owner/Applicant represents it (and any subsidiary) is (a) duly formed and organized, (b) validly existing and in good standing under state law, and (c) has all necessary power to execute and deliver this document and perform its obligations. Owner/Applicant also represents it is authorized to enter into this agreement by all requisite partnership, corporate or other action, and its terms are a valid and legally binding obligation. Neither execution nor delivery of this document nor performance of its obligations will violate any law or provision of any agreement, articles of incorporation, by-laws or other organizational or governing documents relating to Owner/Applicant, nor conflict with any court order relating to Owner/Applicant.

Applicant Signature: _____ **Date:** 8/29/2019

Owner Signature (Required): _____ **Date:** 8/29/2019

CITY OF PACIFIC GROVE
Community Development Department – Planning Division
300 Forest Avenue, Pacific Grove, CA 93950
Tel: 831.648.3190 • Fax: 831.648.3184 • www.cityofpacificgrove.org/cdd

Application # AUP 19-0546

Planning Permit Fee Calculation

Permit	Select	Fee
Architectural Permit – Single Family	☐	$3,052
Administrative Architectural Permit	☐	$1,469
Architectural Design Change	☐	$1,469
Counter Review & Determination – no new square footage	☐	$212
Counter Review & Determination – new square footage	☐	$856
Initial Historic Screening	☐	$452
Sign Permit	☐	$2,241
Administrative Sign Permit	☐	$1,241
Use Permit and Amendments – Single Family	☐	$1,832
Major Administrative Use Permit	☒	$1,184
Minor Administrative Use Permit	☐	$1,199
Variance and Amendment	☐	$2,548
Administrative Variance and Amendment	☐	$1,425
Inquiry Fee	☐	$334
Historic Preservation Permit	☐	$1,735
Accessory Dwelling Unit Permit	☐	$1,783
Tree Permit with Development	☐	$272
Appeal	☐	25% of base permit fee or $1,045 whichever is greater plus noticing costs
Other	☐	

Additional Fees

General Plan Update Fee	**5% of Permit Fee**	☒	$59.2
CEQA Exemption Fee	**$278**	☒	$278
Butterfly Buffer Zone	5% of Permit Fee	☐	
Coastal Zone	25% of Permit Fee	☐	
Area of Special Biological Significance	5% of Permit Fee	☐	
Environmentally Sensitive Habitat Area	15% of Permit Fee	☐	
Noticing – Mailings	$0.55 * (# of Mailings)	☒	$5.50
Noticing – Herald Ad	$349	☐	
Stormwater Fee	Varies	☐	
County filing fee	Varies	☒	$50
File maintenance fee	Varies	☒	$54
Other	Varies	☐	

Total Fees: $1,630.70

CITY OF PACIFIC GROVE
Community Development Department – Planning Division
300 Forest Avenue, Pacific Grove, CA 93950
T: 831.648.3183 • F: 831.648.3184 •

USE PERMIT (UP) NO. 19-0546 FOR A PROPERTY LOCATED AT 1305 FUNSTON AVENUE TO ALLOW A SECOND DETACHED ACCESSORY STRUCTURE WITH PLUMBING.

FACTS

1. The subject site is located at 1305 Funston Avenue, Pacific Grove, CA 93950 (APN 007-567-016)
2. The subject site has a designation of Medium Density Residential (9.7 du/ac) on the adopted City of Pacific Grove General Plan Land Use Map.
3. The project site is located in the R-1 zoning district.
4. The subject site is 4,692 square feet.
5. The subject site is developed with a one-story single-family home, an accessory dwelling unit, a 120 sq. ft. tuff shed, and a 196 sq. ft. accessory structure.
6. This project has been determined to be CEQA Exempt under CEQA Guidelines Section 15303 (e) – Conversion of Small Structures.

FINDINGS

1. The proposed use is allowed with a use permit within the applicable zoning district and complies with all applicable provisions of these regulations;
2. The proposed use is consistent with the general plan, the local coastal program, and any applicable specific plan;
3. The establishment, maintenance, or operation of the use will not, under the circumstances of the particular case, be detrimental to the health, safety, or general welfare of persons residing or working in the neighborhood of the proposed use;
4. The use, as described and conditionally approved, will not be detrimental or injurious to property and improvements in the neighborhood or to the general welfare of the city; and
5. The location, size, design, and operating characteristics of the proposed use are compatible with the existing and future land uses in the vicinity.

PERMIT

Use Permit (UP) 19-0546 to allow a second detached accessory structure with plumbing in compliance with PGMC 23.64.180.

Per Pacific Grove Municipal Code 23.70.080(a) with the following conditions:

CONDITIONS OF APPROVAL

1. **Permit Expiration.** This permit shall expire and be null and void if a building permit has not been applied for within 180 days from and after the date of approval. Application for extension of this approval must be made prior to the expiration date.
2. **Construction Compliance.** All construction must occur in strict compliance with the proposal as set forth in the application, subject to any special conditions of approval herein. Any deviation from approvals must be reviewed and approved by staff, and may require Planning Commission approval.
3. **Terms and Conditions**. These terms and conditions shall run with the land, and it is the intention of the CDD Director and the Permittee to bind all future owners and possessors of the subject property to the terms and conditions, unless amended. Amendments to this permit may be achieved only if an application is made and approved, pursuant to the Zoning Code.

4. **Public Works, Fire and Building.** Review and approval by the Public Works, Fire and Building Departments are required prior to issuance of a building permit. Work taking place in the public right-of-way shall require an encroachment permit prior to issuance of the building permit.
5. **Conformance to Plans.** Development of the site shall conform to approved plans for "1305 Funston" submitted August 29, 2019, on file with the Community and Economic Development Department and to the Building Code, with the exception of any subsequently approved changes.
6. **Building Plans:** All conditions of approval for the Planning permit(s) shall be printed on a full size sheet and included with the construction plan set submitted to the Building Department.

NOW, THEREFORE, BE IT RESOLVED BY THE PLANNING COMMISSION OF THE CITY OF PACIFIC GROVE:

1. The Commission determines that each of the Findings set forth above is true and correct, and by this reference incorporates those Findings as an integral part of this Permit.

2. The Commission authorizes Approval of Use Permit (UP) 19-0546 as conditioned and pursuant to a Class 3, Section 15303, CEQA categorical exemption for Conversion of Small Structures.

3. This permit shall become effective upon the expiration of the 10-day appeal period.

4. This permit shall not take effect until the owner acknowledges and agrees to all terms and conditions and agrees to conform to and comply with those terms and conditions.

PASSED AND ADOPTED BY THE PLANNING COMMISSION OF THE CITY OF PACIFIC GROVE this 9th day of January 2020, by the following votes:

AYES:

NOES:

ABSENT:

ABSTENTIONS:

APPROVED:

_____
Donald Murphy, Chair

The undersigned hereby acknowledge and agree to the approved terms and conditions, and agree to fully conform to, and comply with, said terms and conditions.

_____ _____
Xia Cui, Owner Date

Notice of Exemption

Appendix E

To: Office of Planning and Research
P.O. Box 3044, Room 113
Sacramento, CA 95812-3044

County Clerk
County of: Monterey

From: (Public Agency): City of Pacific Grove
300 Forest Ave
Pacific Grove, CA 93950
(Address)

Project Title: Cui Accessory Building Conversion

Project Applicant: Xia Cui, Owner

Project Location - Specific:
1305 Funston Ave, Pacific Grove, CA 93950 (APN 007-567-016)

Project Location - City: Pacific Grove Project Location - County: Monterey

Description of Nature, Purpose and Beneficiaries of Project:

Convert an existing accessory structure to a garage with plumbing fixtures.

Name of Public Agency Approving Project: City of Pacific Grove

Name of Person or Agency Carrying Out Project: Xia Cui, Owner

Exempt Status: **(check one):**

- ☐ Ministerial (Sec. 21080(b)(1); 15268);
- ☐ Declared Emergency (Sec. 21080(b)(3); 15269(a));
- ☐ Emergency Project (Sec. 21080(b)(4); 15269(b)(c));
- ☒ Categorical Exemption. State type and section number: 15303(e) - Converstion of Small Structures
- ☐ Statutory Exemptions. State code number: _____

Reasons why project is exempt:

The Class 3 exemption allows for the conversion of small accessory structures.

Lead Agency Contact Person: Alex Othon Area Code/Telephone/Extension: 831-648-3183

If filed by applicant:

1. Attach certified document of exemption finding.
2. Has a Notice of Exemption been filed by the public agency approving the project? ☐ Yes ☐ No

Signature: _____ Date: 12/24/2019 Title: Assistant Planner

☐ Signed by Lead Agency ☐ Signed by Applicant

Authority cited: Sections 21083 and 21110, Public Resources Code.
Reference: Sections 21108, 21152, and 21152.1, Public Resources Code.

Date Received for filing at OPR: _____

Revised 2011

Site Plan

Property Address: 1305 Funston Ave, Pacific Grove, CA 93950
Legal Description: Del Monte Park Lot 3 Block 20. APN: 007567016000

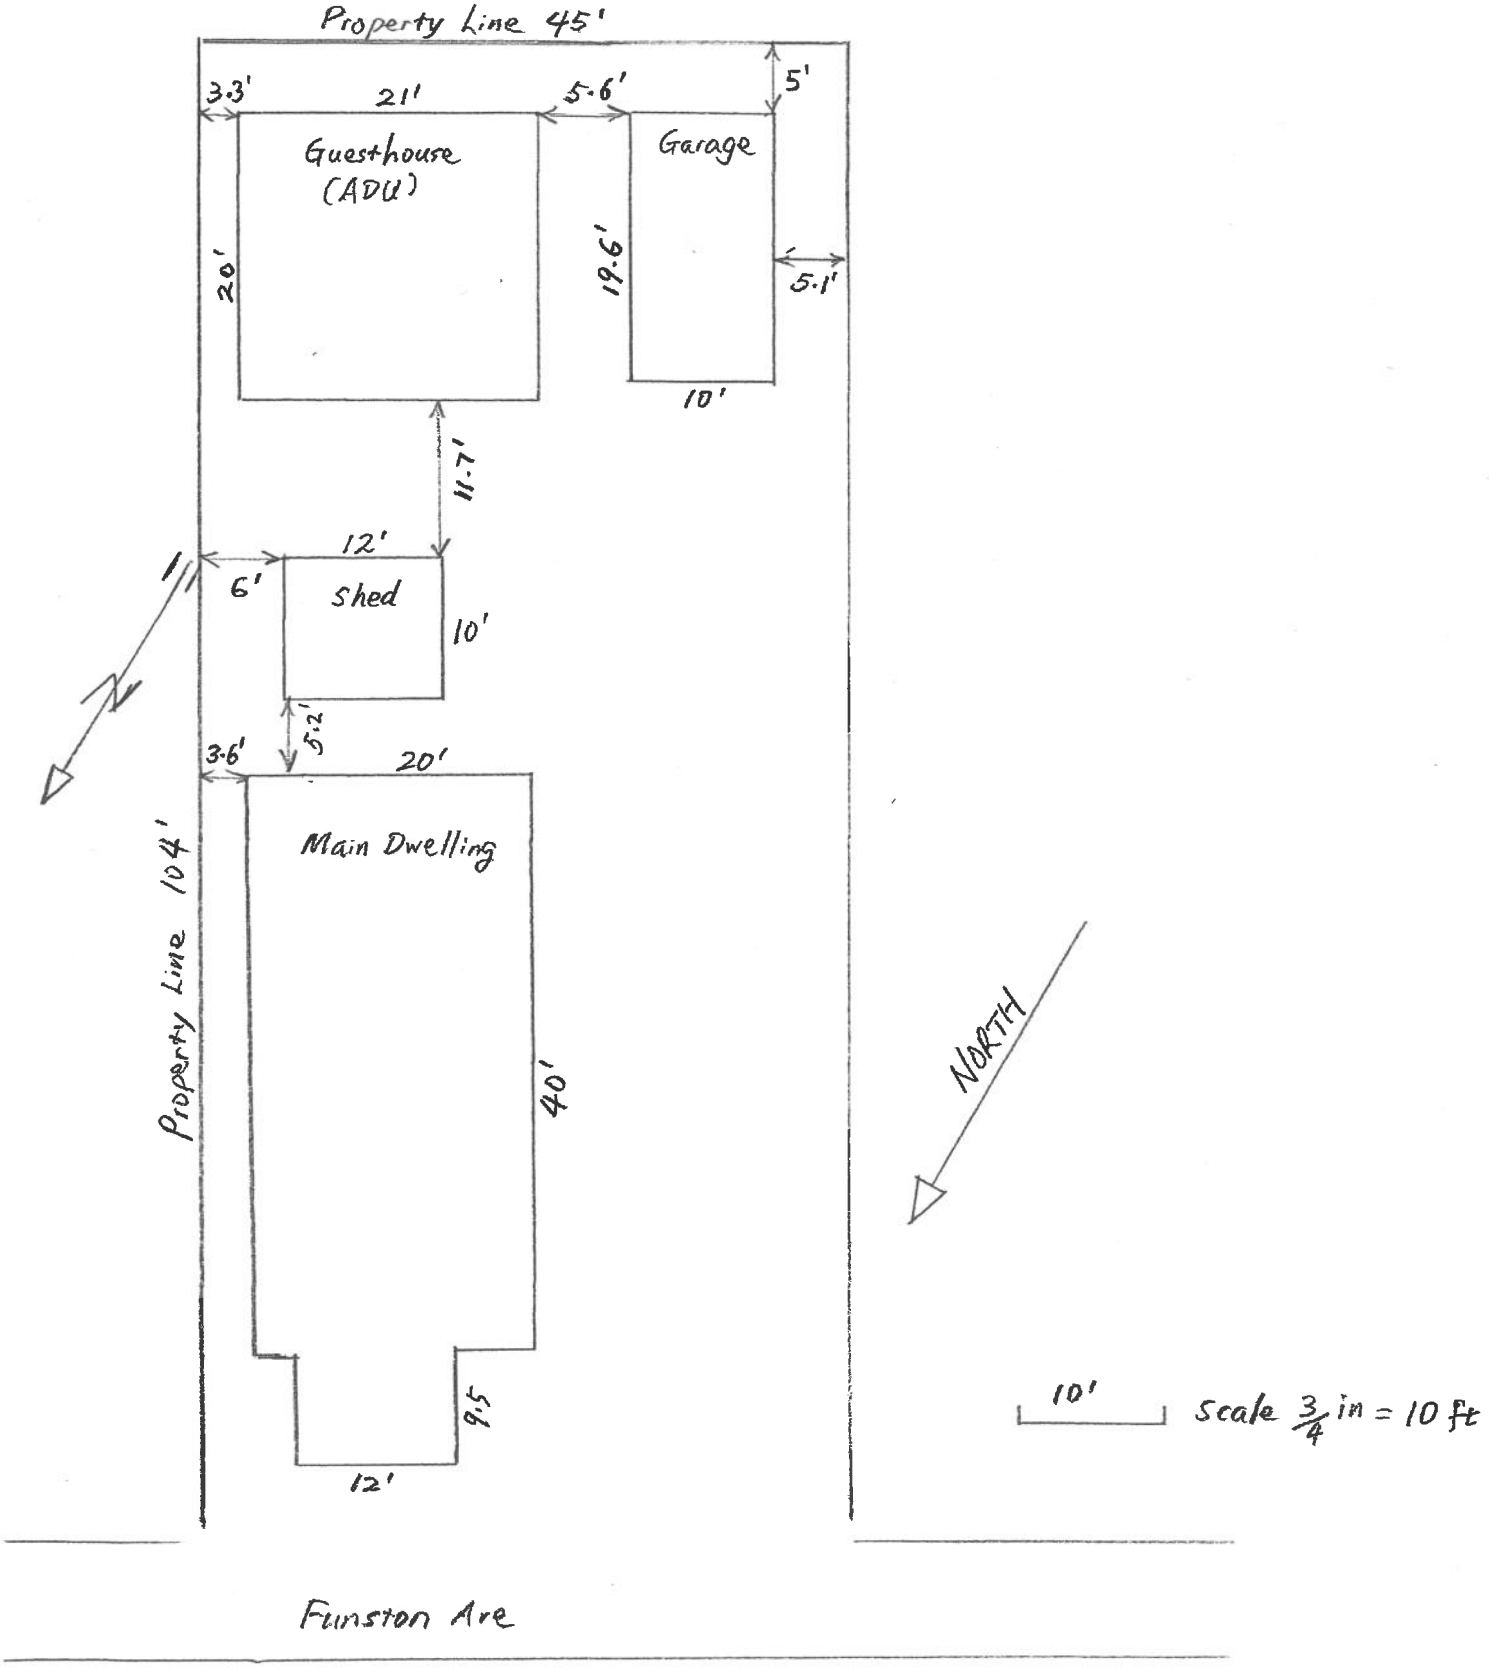

Elevations and Details

Garage:

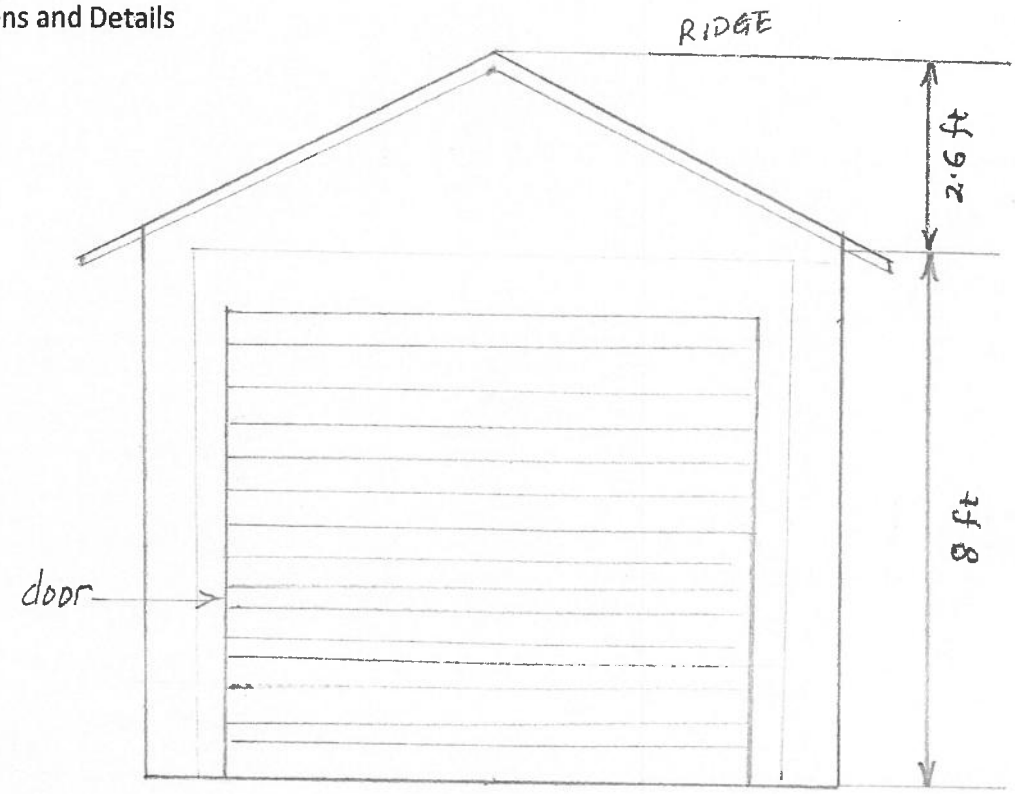

North Elevation
Scale: 3/8" = 1'0"

(South Elevation is same as North)

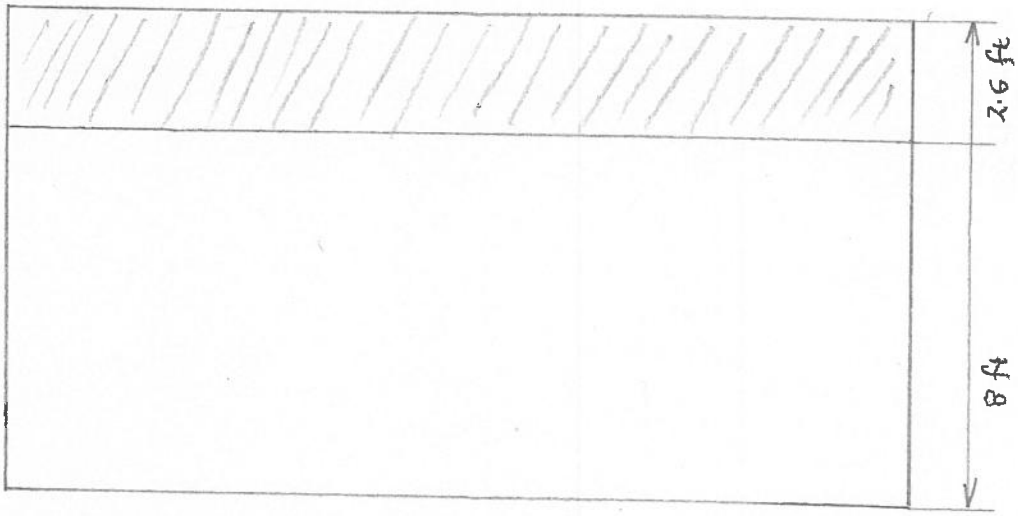

East & West Elevation
Scale: 1/4" = 1'0"

Elevations and Details

Garage:

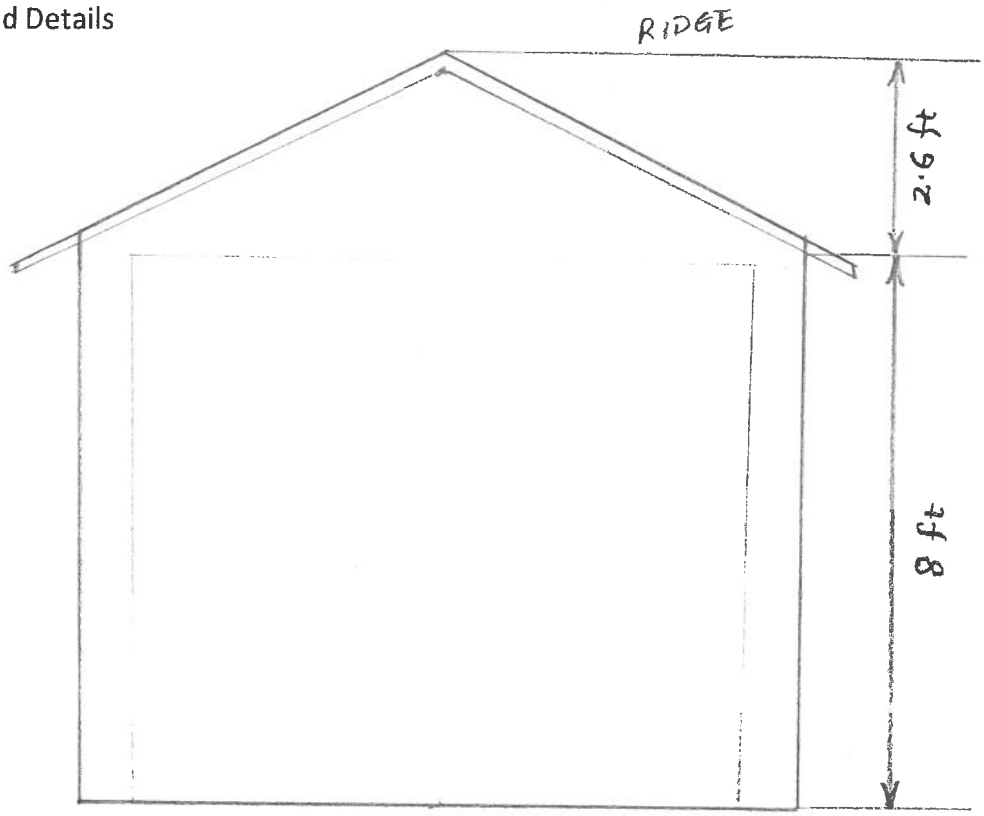

North Elevation
Scale: 3/8" = 1'0"

(South Elevation is same as North)

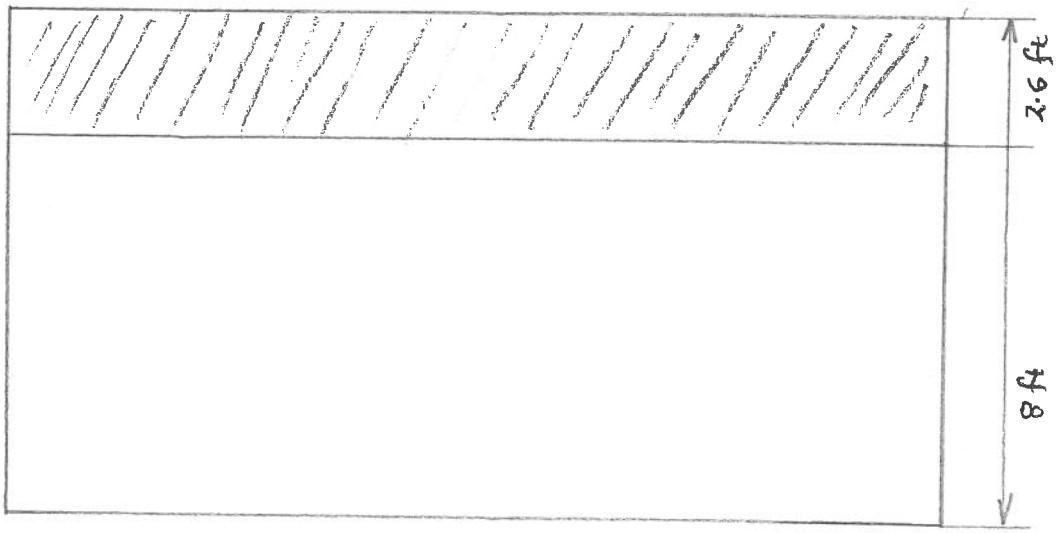

East & West Elevation
Scale: 1/4" = 1'0"

Floor Plans for Garage:

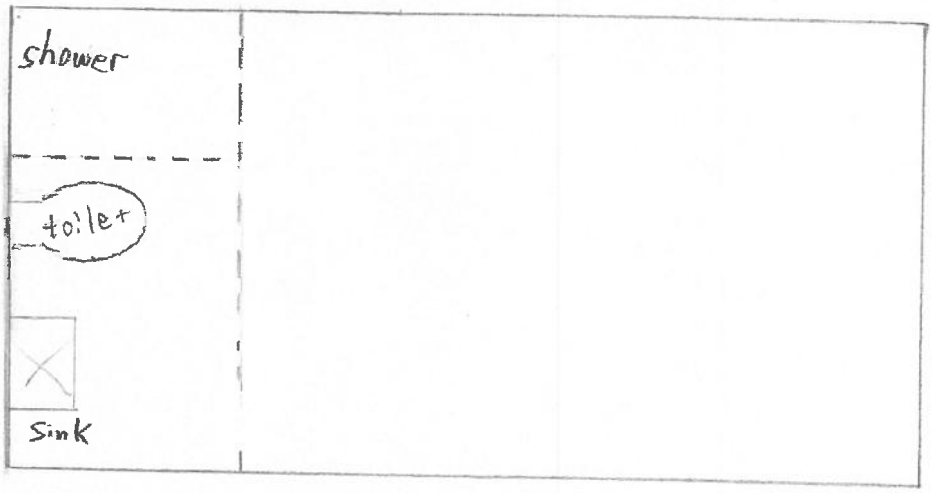

Existing Floor Plan
Scale: 1/4" = 1'0"

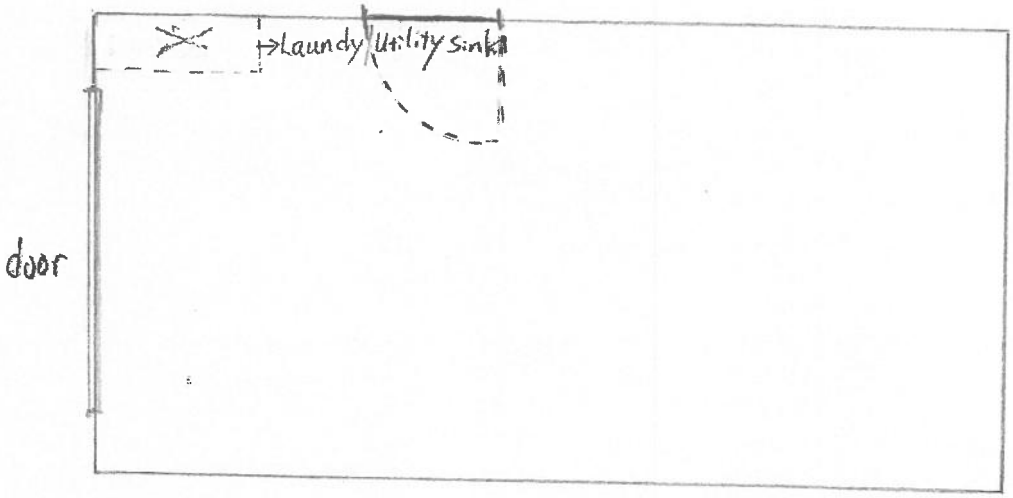

Proposed Floor Plan
Scale 1/4" = 1' 0"

Item No. 6B

Accessory Dwelling Unit (ADU) Ordinance Amendment

CITY OF PACIFIC GROVE

300 Forest Avenue, Pacific Grove, California 93950

AGENDA REPORT

TO: Chair Murphy and Members of the Planning Commission

FROM: Alyson Hunter, Senior Planner

MEETING DATE: January 9, 2020 (Continued from December 19, 2019)

SUBJECT: Accessory Dwelling Units (ADU) Ordinance Amendment

CEQA: Statutorily exempt per Section 15282(h) of the CEQA Guidelines

RECOMMENDATION

Discuss amendments to Chapter 23.80 and provide recommendation to Council.

BACKGROUND

The California State Legislature brought forward several bills in 2019 relating to the planning and permitting of accessory dwelling units (ADUs). In October 2019, among other bills, the Governor signed into law Assembly Bill (AB) 68, AB 881, and Senate Bill (SB) 13 amending the section of the California Government Code related to ADUs (Government Code section 65852.2). Additionally, AB 68 amended standards for Junior ADUs (JADUs) and SB 13 made additions to the State Health and Safety Code (added new Section 17980.12).

The new laws took effect on January 1, 2020, and the text of AB 881 and SB 13 contain a clause providing that a government's ordinance that does not comply with all provisions of the State law shall become null and void. The City is operating under the State law legal framework until a revised City ordinance is adopted by Council.

DISCUSSION

On December 5, 2019, the Planning Commission discussed these new laws, and draft amendments to Pacific Grove Municipal Code (PGMC) Sec. 23.80, the City's ADU ordinance (attached), were crafted to reflect Planning Commission recommendations for Council consideration in relation to the following policy areas:

1. ADU Size and number

- The allowed size of new construction ADUs will be either 50% of the size of the home (for attached ADUs) or 800 square feet (sf), 850 sf, or 1,200 sf depending on number of bedrooms, for detached ADUs.
- Conversion ADUs may be up to 1,200 sf regardless of the size of the parcel or home.
- Conversion ADUs may be expanded by up to 150 sf., not to exceed 1,200 sf total.

2. Setbacks

- Setbacks for detached ADUs are set at three feet, which is more generous than the State law requirement and still allows for a variety of number and size of openings such as windows and doors per Building Code restrictions.
- ADUs may be allowed in front of a primary residence outside of the front yard setback.

3. Height

- Height limitation of 16 feet for detached ADUs. It is possible that a two-story structure could be designed to meet this height limit but most two-story single-family residential structures are between 20 to 25 feet in height.

The State law governing height limits applied to ADUs attached to a primary residence is unclear. Per Planning Commission recommendation, the draft ordinance amendments include the requirement of an Architectural Permit for an ADU that exceeds 16 feet in height. The maximum height limit is governed by the property's zoning district. It is possible that this requirement could be found to be void if it conflicts with any future State clarification on this issue.

4. Parking

- One parking space is required for an ADU that is not within ½ mile of a transit stop.

Other State regulated Development Standards

- Limit on rear yard coverage will not apply to ADUs.
- Parking eliminated by ADU construction need not be replaced.
- ADUs will be allowed on multi-family properties in conjunction with any other existing residential use.
- On multi-family properties, up to two new construction detached ADUs will be permitted, and up to the number that equals 25% of the existing dwelling units may be added by converting non-livable space within existing multi-family buildings.
- A property with a current single-family home will be allowed to have both an ADU and a JADU.

Permitting & Deed Restriction

ADUs are required to obtain a ministerial building permit and no other discretionary or administrative permit process or standards will be applied to an ADU that complies with state law, or to the ADU portion of a larger project unless an Architectural Permit is required to exceed the 16 foot height limit.

OPTIONS

1. No action taken.
2. Defer until a housing consultant is contracted with the City.
3. Repeal the City ordinance and defer to State regulation.
4. Provide staff alternative direction.

CITY COUNCIL GOAL ALIGNMENT

Goal 6 – Increase Affordable Housing: Determine policies, projects and programs that will advance the effort to create new affordable housing in the City.

ATTACHMENTS

1. Draft ADU Ordinance PGMC Sec. 23.80 amendments
2. Current ADU Ordinance
3. AB 881, AB 68, SB 13

RESPECTFULLY SUBMITTED,

Alyson Hunter

Alyson Hunter, Senior Planner

ORDINANCE NO. 20-____

AN ORDINANCE OF THE CITY OF PACIFIC GROVE REPEALING AND REENACTING CHAPTER 23.80 OF THE PACIFIC GROVE MUNICIPAL CODE REGARDING ACCESSORY DWELLING UNITS

WHEREAS, Accessory Dwelling Units (ADUs) are a vital form of housing in the state of California and in the City of Pacific Grove (City); and

WHEREAS, the City has regulated ADUs since 1983 as set forth in Pacific Grove Municipal Code (PGMC) Chapter 23.80; and

WHEREAS, in 2017, in response to state law, the City Council amended Chapter 23.80 to reduce barriers, streamline approval, and further accommodate the development of ADUs; and

WHEREAS, the California State Legislature brought forward several bills in 2019 relating to the planning and permitting of ADUs; and

WHEREAS, in October 2019, Governor Newsom signed numerous housing bills related to the development and regulation of ADUs, which requires the City to make certain additional amendments to PGMC Chapter 23.80; and

WHEREAS, the new standards will facilitate the development of ADUs within the City, and are necessary for maintaining orderly growth and development patterns; and

WHEREAS, the new laws took effect on January 1, 2020, and contain a clause providing that a local government's ordinance that does not comply with all provisions of the State law shall become null and void; and

WHEREAS, the City has determined that it is appropriate to repeal and reenact PGMC Chapter 23.80 to comply with State law and to provide a more streamlined process for the development of ADUs in an effort to provide additional affordable housing opportunities; and

WHEREAS, notice of a public hearing before the Planning Commission was published in the Monterey County Weekly and the Monterey Herald on December 5, 2019, posted at City Hall on December 5, 2019, and continued by the Planning Commission to its meeting on January 9, 2020; and

WHEREAS, this Ordinance repeals and reenacts PGMC Section 23.80, entitled "Accessory Dwelling Units";

WHEREAS, in the enactment of this Ordinance, the City followed the guidelines adopted by the State of California and published in the California Code of Regulations, Title 14, Section 15000, et seq.; and

WHEREAS, repeal and reenactment of PGMC Section 23.80 pertaining to ADUs is statutorily exempt from review under the California Environmental Quality Act (CEQA) per Section 15282(h) of the CEQA Guidelines as it implements Government Code Sections 65852.1 and 65852.2 as set forth in Section 21080.17 of the Public Resources Code; or

NOW, THEREFORE, BE IT ORDAINED BY THE COUNCIL OF THE CITY OF PACIFIC GROVE:

SECTION 1. The foregoing recitals are adopted as findings of the City Council as though set forth fully herein.

SECTION 2. Pacific Grove Municipal Code Chapter 23.80 is hereby repealed, and reenacted to read as follows:

Chapter 23.80

ACCESSORY DWELLING UNITS

Sections:

23.80.010 Purpose and intent.

23.80.020 Effect of nonconforming.

23.80.030 Definitions.

23.80.040 Approvals.

23.80.050 General ADU and JADU Requirements.

23.80.060 Specific ADU Requirements.

23.80.070 Fees and charges.

23.80.080 Nonconforming ADUs and Discretionary Approval.

23.80.010 Purpose and intent.

The purpose of this Chapter is to allow and regulate accessory dwelling units (ADUs) and junior accessory dwelling units (JADUs) in compliance with California Government Code sections 65852.2 and 65852.22, as may be amended.

23.80.020 Effect of nonconforming.

An ADU or JADU that conforms to the standards in this section will not be:

(a) Deemed to be inconsistent with the City's General Plan and zoning designation for the lot on which the ADU or JADU is located.

(b) Deemed to exceed the allowable density for the lot on which the ADU or JADU is located.

(c) Considered in the application of any local ordinance, policy, or program to limit residential growth.

(d) Required to correct a nonconforming zoning condition, as defined in Section 23.80.030. This does not prevent the City from enforcing compliance with applicable building standards in accordance with Health and Safety Code section 17980.12.

23.80.030 Definitions.

As used in this section, terms are defined as follows:

"Accessory dwelling unit" or "ADU" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary residence. An accessory dwelling unit also includes the following:

(a) An efficiency unit, as defined by Section 17958.1 of the California Health and Safety Code, as may be amended; and

(b) A manufactured home, as defined by Section 18007 of the California Health and Safety Code, as may be amended.

"Accessory structure" means a building or structure that is incidental to that of the main building on the same lot.

"Complete independent living facilities" means permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated.

"Efficiency kitchen" means a kitchen that includes each of the following:

(a) A cooking facility with appliances;

(b) A food preparation counter or counters that total at least 15 square feet in area; and

(c) Food storage cabinets that total at least 30 square feet of shelf space.

“Junior accessory dwelling unit” or “JADU” means a residential unit that:

(a) Is no more than 500 square feet in size;

(b) Is contained entirely within an existing or proposed single-family structure;

(c) Includes its own separate sanitation facilities or shares sanitation facilities with the existing or proposed single-family structure; and

(d) Includes an Efficiency kitchen, as defined in this Chapter.

“Living area” means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

“Nonconforming zoning condition” means a physical improvement on a property that does not conform with current zoning standards.

“Passageway” means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the ADU or JADU.

“Proposed dwelling” means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

“Public transit” means a location, including, but not limited to, any fixed-route bus stop or other transit stop with transportation that runs on fixed routes, and is available to the public.

“Tandem parking” means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

23.80.040 Approvals.

The following approvals apply to ADUs and JADUs under this section:

(a) Building-permit only.

If an ADU or JADU complies with each of the general requirements in Section 0 below, it is allowed with only a building permit:

(1) Converted on single-family lot: Only one ADU or JADU on a lot with a proposed or existing single-family dwelling on it, where the ADU or JADU:

(A) Is either: within the space of a proposed single-family dwelling; within the existing space of an existing single-family dwelling; or within the existing space of an accessory structure, plus up to 150 additional square feet if the expansion is limited to accommodating ingress and egress;

(B) Has exterior access that is independent of that for the single-family dwelling; and

(C) Has side and rear setbacks sufficient for fire and safety, as dictated by applicable building and fire codes.

(2) Limited Detached on single-family lot: One detached, new-construction ADU on a lot with a proposed or existing single-family dwelling (in addition to any JADU that might otherwise be established on the lot under subsection (a)(a)(1) above), if the detached ADU satisfies the following limitations:

(A) The side- and rear-yard setbacks are at least three-feet;

(B) The total floor area is 800 square feet or smaller for a studio, 850 sf for a one-bedroom, or up to 1,200 sf for a two-bedroom unit; and

(C) The peak height above grade is 16 feet or less.

(3) Converted on multi-family lot: Multiple ADUs within portions of existing multi-family dwelling structures that are not used as livable space, including but not limited to storage rooms, boiler rooms, passageways, attics, basements, or garages, if each converted ADU complies with state building standards for dwellings. At least one converted ADU is allowed within an existing multi-family dwelling, and up to 25 percent of the existing multi-family dwelling units may each have a converted ADU under this subsection.

(4) Limited Detached on multi-family lot: No more than two detached ADUs on a lot that has an existing multi-family dwelling if each detached ADU satisfies the following limitations:

(A) The side- and rear-yard setbacks are at least four-feet; and

(B) The total floor area is 800 square feet or smaller.

(b) Process and Timing.

(1) An ADU permit is considered and approved ministerially, without discretionary review or a hearing.

(2) The City must act on an application to create an ADU or JADU within 60 days from the date that the City receives a completed application, unless either:

(A) The applicant requests a delay, in which case the 60-day time period is tolled for the period of the requested delay, or

(B) In the case of a JADU and the application to create a JADU is submitted with a permit application to create a new single-family dwelling on the lot, the City may delay acting on the permit application for the JADU until the City acts on the permit application to create the new single-family dwelling, but the application to create the JADU will still be considered ministerially without discretionary review or a hearing.

23.80.050 General ADU and JADU Requirements.

The following requirements apply to all ADUs and JADUs that are approved under Section 23.80.040(a).

(a) Zoning. An ADU or JADU subject only to a building permit under Section 23.80.040(a) may be created on a lot in any zone that allows residential uses. With the following exceptions:

(1) R-1-B-4 zoning district, pursuant to the local coastal program land use plan;

(2) R3-PGB zoning district including the portion of the Pacific Grove Beach Tract bounded by Lorelei Street on the east, Ocean View Boulevard on the north, Sea Palm Avenue on the west, and the southerly property line of property on the south side of Mermaid Avenue to the south due to the dense nature of existing development on small lots.

(3) Monarch Pines Mobile Home Park (M-H zoning district) is exempt from development of all accessory dwelling units pursuant to senior citizen owner occupancy requirements of the Monarch Pines Mobile Home Park community.

(b) Fire Sprinklers. Fire sprinklers are required in an ADU if sprinklers are required in the primary residence.

(c) Rental Term. No ADU or JADU may be rented for a term that is less than 30 days.

(d) No Separate Conveyance. An ADU or JADU may be rented, but no ADU or JADU may be sold or otherwise conveyed separately from the lot and the primary dwelling (in the case of a single-family lot) or from the lot and all of the dwellings (in the case of a multifamily lot).

(e) Septic System. If the ADU or JADU will connect to an onsite water-treatment system, the owner must include with the application a percolation test completed within the last five years or, if the percolation test has been recertified, within the last 10 years.

(f) Deed Restriction. Prior to issuance of a building permit for an ADU or JADU after January 1, 2025, a deed restriction must be recorded against the title of the property in the County Recorder's office and a copy filed with the Director. The deed restriction must run with the land and bind all future owners. The form of the deed restriction will be provided by the City and must provide that:

(1) The ADU or JADU may not be sold separately from the primary dwelling.

(2) The ADU or JADU is restricted to the approved size and to other attributes allowed by this section.

(3) The deed restriction runs with the land and may be enforced against future property owners.

(4) The deed restriction may be removed if the owner eliminates the ADU or JADU, as evidenced by, for example, removal of the kitchen facilities. To remove the deed restriction, an owner may make a written request of the Director, providing evidence that the ADU or JADU has in fact been eliminated. The Director may then determine whether the evidence supports the claim that the ADU or JADU has been eliminated. Appeal may be taken from the Director's determination consistent with other provisions of this Code. If the ADU or JADU is not entirely physically removed but is only eliminated by virtue of having a necessary component of an ADU or JADU removed, the remaining structure and improvements must otherwise comply with applicable provisions of this Code.

(5) The deed restriction is enforceable by the Director or designee for the benefit of the City. Failure of the property owner to comply with the deed restriction may result in legal action against the property owner, and the City is authorized to obtain any remedy available to it at low or equity, including, but not limited to, obtaining an injunction enjoining the use of the ADU or JADU in violation of the recorded restrictions or abatement of the illegal unit.

23.80.060 Specific ADU Requirements.

(a) Maximum Size.

(1) The maximum size of a detached or attached ADU subject to this Section is 850 square feet for a studio or one-bedroom unit and 1,000 square feet for a unit with two bedrooms. No more than two bedrooms are allowed.

(2) An attached ADU that is created on a lot with an existing primary dwelling is further limited to 50 percent of the floor area of the existing primary dwelling.

(3) Application of other development standards in this section, such as lot coverage, might further limit the size of the ADU, but no application of lot coverage, or open-space requirements may require the ADU to be less than 800 square feet.

(b) **Lot Coverage.** No ADU subject to this Section may cause the total lot coverage of the lot to exceed 50 percent, subject to subsection (a)(3) above.

(c) **Minimum Open Space.** No ADU subject to this Section may cause the total percentage of building coverage open space of the lot to fall below the applicable zoning district threshold subject to subsection (a)(3) above.

(d) **Height.**

(1) A single-story attached or detached ADU may not exceed 16 feet in height above grade, measured to the peak of the structure.

(2) A second story or two-story attached ADU addition may be permitted subject to an Architectural permit and may not exceed the height of the zoning district.

(e) **Passageway.** No passageway, as defined in section 23.80.030, is required for an ADU.

(f) **Parking.**

(1) Generally. One off-street parking space is required for each ADU. The parking space may be provided in setback areas or as tandem parking, as defined by Section 23.80.030.

(2) Exceptions. No parking under subsection (1) is required in the following situations:

(A) The ADU is located within one-half mile walking distance of public transit, as defined in Section 23.80.030.

(B) The ADU is part of the proposed or existing primary residence or an accessory structure under Section 23.80.040(a)(1).

(C) When on-street parking permits are required but not offered to the occupant of the ADU.

(D) When there is an established car share vehicle stop located within one block of the ADU.

(3) No Replacement. When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an ADU or converted to an ADU, those offstreet parking spaces are not required to be replaced.

(g) **Architectural Requirements.**

(1) Where the development of an ADU includes exterior alterations, additions, or construction of new structure, the ADU shall incorporate the same or similar architectural features, building materials, including window style and materials, and roof slopes as the main dwelling unit or dwellings located on adjacent properties.

(2) Any exterior alteration or addition to a dwelling on the historic resources inventory shall be consistent with the Secretary of the Interior's Standards for the Treatment of Historic Properties.

(h) **Landscape Requirements.**

The site plan shall provide open space and landscaping that are useful for both the ADU and the principal single-family dwelling. Landscaping shall provide for the privacy and screening of adjacent properties.

(i) **Historical Protections.** The following requirements apply to ADUs on or within 600 feet of real property that is listed in the California Register of Historic Resources:

To Be Determined by PC

23.80.070 Fees and charges.

(a) Impact Fees.

(1) No impact fee is required for an ADU that is less than 750 square feet in size.

(2) Any impact fee that is required for an ADU that is 750 square feet or larger in size must be charged proportionately in relation to the square footage of the primary dwelling unit. (E.g.,

the floor area of the primary dwelling, divided by the floor area of the ADU, times the typical fee amount charged for a new dwelling.) "Impact fee" here does not include any connection fee or capacity charge for water or sewer service.

(b) Utility Fees.

Converted ADUs and JADUs on a single-family lot, created under Section 23.80.040(a)(1), are not required to have a new or separate utility connection directly between the ADU or JADU and the utility. Nor is a connection fee or capacity charge required unless the ADO or JADU is constructed with a new single-family home.

23.80.080 Nonconforming ADUs and Discretionary Approval.

Any proposed ADU or JADU that does not conform to the objective standards set forth in this Chapter may be allowed by the City with a use permit, in accordance with the other provisions of this Title.

SECTION 3. The City Manager is directed to execute all documents and to perform all other necessary City acts to implement effect this Ordinance.

SECTION 4. Severability. If any provision, section, paragraph, sentence, clause or phrase of this ordinance, or any part thereof, or the application thereof to any person or circumstance is for any reason held to be invalid or unconstitutional by a court of competent jurisdiction, such decision shall not affect the validity of the remaining portions of this Ordinance, or any part thereof, or its application to other persons or circumstances. The City Council hereby declares that it would have passed and adopted each provision, section, paragraph, subparagraph, sentence, clause or phrase thereof, irrespective of the fact that any one or more sections, paragraphs, subparagraphs, sentences, clauses or phrases, or the application thereof to any person or circumstance, be declared invalid or unconstitutional.

SECTION 5. In accord with Article 15 of the City Charter, this ordinance shall become effective on the thirtieth (30th) day following passage and adoption hereof.

PASSED AND ADOPTED BY THE COUNCIL OF THE CITY OF PACIFIC GROVE THIS ____ day of _____, 2020, by the following vote:

AYES:

NOES:

ABSENT:

APPROVED:

_____
BILL PEAKE, Mayor

ATTEST:

_____
SANDRA KANDELL, City Clerk
DATED:_____

APPROVED AS TO FORM:

_____
DAVID C. LAREDO, City Attorney

DRAFT

Chapter 23.80
ACCESSORY DWELLING UNITS

Sections:

23.80.010 Purpose and intent.
23.80.020 Definition.
23.80.030 Location.
23.80.040 Permitting procedures.
23.80.050 Submittal requirements and application processing.
23.80.060 Development standards.
23.80.070 Occupancy and ownership.
23.80.080 Fees and charges.

23.80.010 Purpose and intent.
The city recognizes the importance of a suitable living environment for all residents. The State Legislature has declared that “accessory dwelling units” (ADUs) are a valuable form of housing in California. It is the intent of the city to permit accessory dwelling units, in conformance with state law, subject to standards that will ensure the units contribute to a suitable living environment for all residents. [Ord. 17-013 § 2, 2017; Ord. 03-08 § 8, 2003].

23.80.020 Definition.
“Accessory dwelling unit” means an attached or a detached residential dwelling unit which provides complete independent living facilities for one or more persons. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family dwelling is situated. An accessory dwelling unit also includes the following:

(a) An efficiency unit, as defined in Section 17958.1 of the Health and Safety Code.

(b) A manufactured home, as defined in Section 18007 of the Health and Safety Code. [Ord. 17-013 § 2, 2017; Ord. 03-08 § 8, 2003].

23.80.030 Location.
(a) One accessory dwelling unit whether contained within the existing space of an existing primary residence or accessory structure or attached or added on to a primary residence or a detached unit may be located on a lot zoned for single-family residential use as an allowed use, which contains or is being developed for only a legal single-family detached dwelling with the following exceptions:

(1) Areas as listed below are exempt from the development of accessory dwelling units that are attached or added on to a primary residence or are detached:

(A) R-1-B-4 zoning district, pursuant to the local coastal program land use plan;

(B) R3-PGB zoning district including the portion of the Pacific Grove Beach Tract bounded by Lorelei Street on the east, Ocean View Boulevard on the north, Sea Palm Avenue on the west, and the southerly property line of property on the south side of Mermaid Avenue to the south due to the dense nature of existing development on small lots.

(2) Monarch Pines Mobile Home Park (M-H zoning district) is exempt from development of all accessory dwelling units pursuant to senior citizen owner occupancy requirements of the Monarch Pines Mobile Home Park community.

(b) Accessory dwelling units that conform to this chapter are not considered to exceed the allowable density for the lot upon which the unit is located and shall be deemed to be consistent with the existing general plan and zoning designation for the lot. A detached accessory dwelling unit is not considered an accessory building. [Ord. 17-013 § 2, 2017; Ord. 03-08 § 8, 2003].

23.80.040 Permitting procedures.
(a) Any application in any single-family residential zone to create one accessory dwelling unit, per single-family lot, that is contained within the existing space of a primary residence or accessory structure, has independent exterior access from the existing residence and has side and rear setbacks sufficient for fire safety shall be approved ministerially, including in nonconforming structures or on nonconforming lots, subject to the building permit requirements.

(b) Any application for an accessory dwelling unit that meets all the location and development standards contained in this chapter shall be approved ministerially without discretionary review or public hearing. [Ord. 17-013 § 2, 2017; Ord. 04-03 § 4, 2004; Ord. 03-08 § 8, 2003].

23.80.050 Submittal requirements and application processing.
(a) Step One – Submittal. The application package for an accessory dwelling unit permit to the community and economic development department shall include:

(1) Site Plan (Drawn to Scale). Dimension the perimeter of parcel on which the accessory dwelling unit will be located. Indicate the location and dimensioned setbacks of all existing and proposed structures on the project site. Include all easements, building envelopes, trees, and features in the adjacent public right-of-way.

(2) Floor Plans. Each room shall be dimensioned and the resulting floor area calculation included. The use of each room shall be identified. The size and location of all windows and doors shall be clearly depicted.

(3) Elevations. North, south, east and west elevations which show all openings, exterior materials and finishes, original and finish grades, and roof pitch for the existing residence and the proposed accessory dwelling unit.

(4) Cross Section. Provide building cross sections including, but not limited to: structural wall elements, roof, foundation, fireplace and any other sections necessary to illustrate earth-to-wood clearances and floor-to-ceiling heights.

(5) Color Photographs of the Site and Adjacent Properties. The photos shall be taken from each of the property lines of the project site to show the project site and adjacent sites. Label each photograph and reference to a separate site plan indicating the location and direction of the photograph.

(6) Water. A completed Monterey Peninsula Water Management District residential water release form and water permit application, showing the existing and proposed fixture units. If sufficient fixture units are not available on the site to serve the accessory dwelling unit, the applicant shall request the project be placed on the Pacific Grove water waiting list.

(7) Fee. A permit application fee in the amount established from time to time by resolution of the city council.

(b) Step Two – Issuance.

(1) If the application conforms to the provisions of PGMC 23.80.040(a) a nonappealable ministerial permit for accessory dwelling units within an existing residence or accessory structure shall be issued, subject to the building permit requirements.

(2) If the application conforms to the specific standards contained in PGMC 23.80.060, the community development director shall issue an accessory dwelling unit permit ministerially without discretionary review.

The decision of the community development director is final and is not subject to appeal. [Ord. 17-013 § 2, 2017; Ord. 03-08 § 8, 2003].

23.80.060 Development standards.
An accessory dwelling unit permit will be issued only if it complies with all the following development standards:

(a) Table 1.

	Accessory Dwelling Unit		
	Within Existing Residence or Accessory Structure	**Attached to the Primary Residence**	**Detached**
Existing Development	Single-family dwelling or accessory structure must exist on the site	Single-family dwelling must exist on the site or be constructed on the site in conjunction with the construction of the accessory dwelling unit	
Number per Lot	One	One	One
Minimum Lot Size	No limitation	4,000 sf	4,000 sf
Maximum Unit Size	No limitation	No more than 50 percent of the existing living area to a maximum of 800 sf	800 sf
Minimum Setback[1, 2]			
Front	Existing	As required by the applicable zoning district	
Side	Sufficient for fire access		
Rear	Sufficient for fire access		
Separation between Buildings	Not applicable	5 feet from detached structures on the same site	5 feet from other structures on the same site
Maximum Height	Existing residence or accessory structure (including nonconforming structures)	Height limit applicable to the zoning district	15 feet[3]
Access	Independent exterior entrance to the unit required	Independent exterior entrance to the unit required. Both entrances may not be located on the building elevation fronting the street	
Lot Coverage and Floor Area[4]	Existing	Included in lot coverage and floor area applicable to the site	
Off-Street Parking[5]	None required		

1. No setback is required for an existing garage conversion to accessory dwelling unit.

2. Five feet side and rear setback is required for an accessory dwelling unit constructed above a garage.

3. Twenty-five feet if unit is located above a detached garage.

4. Floor area is measured to the outside surface of exterior walls, with no exceptions.

5. When a garage, carport or covered parking is eliminated in conjunction with the construction of an accessory dwelling unit, replacement spaces in accordance with the requirements of the applicable zoning district shall be provided. These spaces may be uncovered and located in any configuration on the same lot.

(b) Architectural Compatibility.

(1) Where the development of an accessory dwelling unit includes exterior alterations, additions, or construction of new structure, the accessory dwelling unit shall incorporate the same or similar architectural features, building materials, including window style and materials, and roof slopes as the main dwelling unit or dwellings located on adjacent properties.

(2) Any exterior alteration or addition to a dwelling on the historic resources inventory shall be consistent with the Secretary of the Interior's Standards for the Treatment of Historic Properties.

(c) Permanent Foundation. A permanent foundation shall be required for all accessory dwelling units.

(d) Fire Sprinklers. Fire sprinklers shall be required in an accessory dwelling unit only if they are required in the primary residence on the lot.

(e) Utilities. All utilities for detached units shall be installed underground. Installation of a separate direct connection between the accessory dwelling unit and the utility is not required for an accessory dwelling unit contained within the existing space of the existing primary residence or accessory structure.

(f) Sewer. Prior to issuance of a building permit, the applicant shall submit certification by a licensed plumbing contractor, or his or her designee, that the existing lateral sewer line is of adequate size and condition to support projected sewage flow for the primary and accessory dwelling unit. The certification shall be based on the recommendation of the applicant's professional representative for both capacity and condition analysis. If the capacity or condition of the existing lateral line is found to be inadequate to serve the existing and proposed units on the property, the lateral line shall be replaced to the main line, to include the connection at the main line, at the expense of the applicant, subject to PGMC 23.80.080. [Ord. 17-013 § 2, 2017; Ord. 14-013 § 2, 2014; Ord. 04-03 § 5, 2004; Ord. 03-08 § 8, 2003].

23.80.070 Occupancy and ownership.
(a) Both the principal place of residence and the accessory dwelling unit may be rented.

(b) The rental shall only be for terms of 30 days or longer.

(c) Neither the primary residence nor the accessory dwelling unit shall be available for short-term vacation rental.

(d) The accessory dwelling unit shall not be sold separately from the primary residence. [Ord. 17-013 § 2, 2017].

23.80.080 Fees and charges.
(a) Accessory dwelling units shall not be considered new residential uses for the purposes of calculating connection fees or capacity charges.

(b) Connection fee or capacity charges may be imposed for accessory dwelling units that are not contained within the existing space of an existing primary residence or accessory structure. The local jurisdiction may require new or separate utility connections for which an agency may institute a connection fee or capacity charge that shall be proportionate to the burden imposed by the accessory dwelling unit based upon its size or number of plumbing fixtures. [Ord. 17-013 § 2, 2017].

Mobile Version

STATE OF CALIFORNIA
AUTHENTICATED
ELECTRONIC LEGAL MATERIAL

Assembly Bill No. 881

CHAPTER 659

An act to amend, repeal, and add Section 65852.2 of the Government Code, relating to housing.

[Approved by Governor October 9, 2019. Filed with Secretary of State October 9, 2019.]

LEGISLATIVE COUNSEL'S DIGEST

AB 881, Bloom. Accessory dwelling units.

(1) The Planning and Zoning Law provides for the creation of accessory dwelling units by local ordinance, or, if a local agency has not adopted an ordinance, by ministerial approval, in accordance with specified standards and conditions. Existing law requires the ordinance to designate areas where accessory dwelling units may be permitted and authorizes the designated areas to be based on criteria that includes, but is not limited to, the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety.

This bill would instead require a local agency to designate these areas based on the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. The bill would also prohibit a local agency from issuing a certificate of occupancy for an accessory dwelling unit before issuing a certificate of occupancy for the primary residence.

(2) Existing law requires an ordinance providing for the creation of accessory dwelling units, as described above, to impose standards on accessory dwelling units, including, among other things, lot coverage. Existing law also requires such an ordinance to require that the accessory dwelling units be either attached to, or located within, the living area of the proposed or existing primary dwelling, or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

This bill would delete the provision authorizing the imposition of standards on lot coverage and would prohibit an ordinance from imposing requirements on minimum lot size. The bill would revise the requirements for an accessory dwelling unit by providing that the accessory dwelling unit may be attached to, or located within, an attached garage, storage area, or an accessory structure, as defined.

(3) Existing law prohibits a local agency from requiring a setback for an existing garage that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit. Existing law requires that an accessory dwelling unit that is constructed above a garage have a setback of no more than 5 feet.

This bill would instead prohibit a setback requirement for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit. The bill would also instead require a setback of no more than 4 feet for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(4) Existing law provides that replacement offstreet parking spaces, required by a local agency when a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, may be located in any configuration on the same lot as the accessory dwelling unit, except as provided.

This bill would instead prohibit a local agency from requiring the replacement of offstreet parking spaces when a garage, carport, or covered parking structure is demolished or converted, as described above.

(5) Existing law requires a local agency to ministerially approve or deny a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit within 120 days of receiving the application.

This bill would instead require a local agency to ministerially approve or deny a permit application for the creation of an accessory dwelling unit or junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. The bill would authorize the permitting agency to delay acting on the permit application if the permit application is submitted with a permit application to create a new single-family or multifamily dwelling on the lot, as specified.

(6) Existing law prohibits a local agency from utilizing standards to evaluate a proposed accessory dwelling unit on a lot that is zoned for residential use that includes a proposed or existing single-family dwelling other than the criteria described above, except, among one other exception, a local agency may require an applicant for a permit to be an owner-occupant of either the primary or accessory dwelling unit as a condition of issuing a permit.

This bill, until January 1, 2025, would prohibit a local agency from imposing an owner-occupant requirement, as described above.

(7) Existing law authorizes a local agency to establish minimum and maximum unit size limitations on accessory dwelling units, provided that the ordinance permits an efficiency unit to be constructed in compliance with local development standards.

This bill would prohibit a local agency from establishing a minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit, as defined. The bill would also prohibit a local agency from establishing a maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than 850 square feet, and 1,000 square feet if the accessory dwelling

unit contains more than one bedroom. The bill would also instead prohibit a local agency from establishing any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size for either attached or detached dwelling units that prohibits at least an 800 square foot accessory dwelling unit that is at least 16 feet in height and with a 4-foot side and rear yard setbacks.

(8) Existing law prohibits a local agency from imposing parking standards for an accessory dwelling unit if, among other conditions, the accessory dwelling unit is located within ½ mile of public transit.

This bill would make that prohibition applicable if the accessory dwelling unit is located within ½ mile walking distance of public transit, and would define public transit for those purposes.

(9) Existing law requires a local agency to ministerially approve an application for a building permit to create within a zone for single-family use one accessory dwelling unit per single family lot of the unit that is contained within the existing space of a single-family residence or accessory structure when specified conditions are met, including that the side and rear setbacks are sufficient for fire safety.

This bill would instead require ministerial approval of an application for a building permit within a residential or mixed-use zone to create the following: (1) one accessory dwelling unit and one junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if certain requirements are met; (2) a detached, new construction accessory dwelling unit that meets certain requirements and would authorize a local agency to impose specified conditions relating to floor area and height on that unit; (3) multiple accessory dwelling units within the portions of an existing multifamily dwelling structure provided those units meet certain requirements; or (4) not more than 2 accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to certain height and rear yard and side setback requirements.

(10) Existing law prohibits a local agency, special district, or water corporation from considering an accessory dwelling unit to be a new residential use for purposes of calculating fees or capacity charges.

This bill would establish an exception from the above-described prohibition in the case of an accessory dwelling unit that was constructed with a new single-family home.

(11) Existing law requires a local agency to submit a copy of the adopted ordinance to the Department of Housing and Community Development and authorizes the department to review and comment on the ordinance.

This bill would instead authorize the department to submit written findings to the local agency as to whether the ordinance complies with the statute authorizing the creation of an accessory dwelling unit, and, if the department finds that the local agency's ordinance does not comply with those provisions, would require the department to notify the local agency within a reasonable time. The bill would require the local agency to consider the

department's findings and either amend its ordinance to comply with those provisions or adopt it without changes and include specified findings. If the local agency does not amend it ordinance or does not adopt those findings, the bill would require the department to notify the local agency and authorize it to notify the Attorney General that the local agency is in violation of state law, as provided. The bill would authorize the department to adopt guidelines to implement uniform standards or criteria to supplement or clarify the provisions authorizing accessory dwelling units.

(12) Existing law defines the term "accessory dwelling unit" for these purposes to mean an attached or a detached residential dwelling unit which provides complete independent living facilities for one or more persons.

This bill would revise the definition to additionally require an accessory dwelling unit be located on a lot with a proposed or existing primary residence in order for the provisions described above to apply.

(13) This bill would incorporate additional changes to Section 65852.2 of the Government Code proposed by SB 13 to be operative only if this bill and SB 13 are enacted and this bill is enacted last.

(14) By increasing the duties of local agencies with respect to land use regulations, this bill would impose a state-mandated local program.

(15) The California Constitution requires the state to reimburse local agencies and school districts for certain costs mandated by the state. Statutory provisions establish procedures for making that reimbursement.

This bill would provide that no reimbursement is required by this act for a specified reason.

(16) This bill would include findings that the changes proposed by this bill address a matter of statewide concern rather than a municipal affair and, therefore, apply to all cities, including charter cities.

The people of the State of California do enact as follows:

SECTION 1. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. A local agency that does not provide water or sewer services shall consult with the local water or sewer service provider regarding the adequacy of water and sewer services before designating an area where accessory dwelling units may be permitted.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any

real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily use and includes a proposed or existing single-family dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to a unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application to create an accessory dwelling unit or a junior accessory dwelling unit shall be considered ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs that it incurs as a result of amendments to this paragraph enacted during the 2001–02 Regular Session of the Legislature, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot zoned for residential use that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this

subdivision, shall be used or imposed, including an owner-occupant requirement, except that a local agency may require the property to be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and

minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit and one junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics,

basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(5) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(6) Notwithstanding subdivision (c) and paragraph (1), a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) Accessory dwelling units shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(A) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family home.

(B) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section

66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its size or the number of its plumbing fixtures, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with this section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary residence. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit, as defined in Section 17958.1 of the Health and Safety Code.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(4) "Local agency" means a city, county, or city and county, whether general law or chartered.

(5) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(6) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(7) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(8) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(9) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(*l*) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) This section shall remain in effect only until January 1, 2025, and as of that date is repealed.

SEC. 1.5. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. A local agency that does not provide water or sewer services shall consult with the local water or sewer service provider regarding the adequacy of water and sewer services before designating an area where accessory dwelling units may be permitted.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed, including any owner-occupant requirement, except that a local agency may require that the property be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be

combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(5) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(6) Notwithstanding subdivision (c) and paragraph (1) a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit

less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family home.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with this section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing

the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary residence. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(*l*) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall remain in effect only until January 1, 2025, and as of that date is repealed.

SEC. 2. Section 65852.2 is added to the Government Code, to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Places. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily use and includes a proposed or existing single-family dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to a unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application to create an accessory dwelling unit or a junior accessory dwelling unit shall be considered ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs that it incurs as a result of amendments to this paragraph enacted during the 2001–02 Regular Session of the Legislature, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the denial of a building permit or a use permit under this subdivision.

(6) (A) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot zoned for residential use that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed, except that, subject to subparagraph (B), a local agency may require an applicant for a permit issued pursuant to this subdivision for an accessory dwelling unit created on or after January 1, 2025, to be an owner-occupant, or may require the property to be used for rentals of terms longer than 30 days.

(B) Notwithstanding subparagraph (A), a local agency shall not impose an owner-occupant requirement on an accessory dwelling unit permitted

between January 1, 2020, to January 1, 2025, during which time the local agency was prohibited from imposing an owner-occupant requirement.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not

permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit and one junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics,

basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency may require owner occupancy for either the primary dwelling or the accessory dwelling unit on a single-family lot, subject to the requirements of paragraph (6) of subdivision (a).

(5) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(6) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(7) Notwithstanding subdivision (c) and paragraph (1), a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) Accessory dwelling units shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(A) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family home.

(B) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its size or the number of its plumbing fixtures, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with this section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary

residence. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit, as defined in Section 17958.1 of the Health and Safety Code.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(4) "Local agency" means a city, county, or city and county, whether general law or chartered.

(5) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(6) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(7) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(8) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(9) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(*l*) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) This section shall become operative on January 1, 2025.

SEC. 2.5. Section 65852.2 is added to the Government Code, to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. A local agency that does not provide water or sewer services shall consult with the local

water or sewer service provider regarding the adequacy of water and sewer services before designating an area where accessory dwelling units may be permitted.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the

approval of accessory dwelling units, unless and until the agency adopts on ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) (A) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed except that, subject to subparagraph (B), a local agency may require an applicant for a permit issued pursuant to this subdivision to be an owner-occupant or that the property be used for rentals of terms longer than 30 days.

(B) Notwithstanding subparagraph (A), a local agency shall not impose an owner-occupant requirement on an accessory dwelling unit permitted between January 1, 2020, to January 1, 2025, during which time the local agency was prohibited from imposing an owner-occupant requirement.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and may shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency may require owner occupancy for either the primary dwelling or the accessory dwelling unit on a single-family lot, subject to the requirements of paragraph (6) of subdivision (a).

(5) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(6) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(7) Notwithstanding subdivision (c) and paragraph (1) a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said

accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with this section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than

30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary residence. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(A) An efficiency unit, as defined in Section 17958.1 of the Health and Safety Code.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(*l*) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall become operative on January 1, 2025.

SEC. 3. Sections 1.5 and 2.5 of this bill incorporates amendments to Section 65852.2 of the Government Code proposed by both this bill and Senate Bill 13. That section of this bill shall only become operative if (1) both bills are enacted and become effective on or before January 1, 2020, (2) each bill amends Section 65852.2 of the Government Code, and (3) this bill is enacted after Senate Bill 13, in which case Sections 1 and 2 of this bill shall not become operative.

SEC. 4. No reimbursement is required by this act pursuant to Section 6 of Article XIII B of the California Constitution because the only costs that may be incurred by a local agency or school district will be incurred because this act creates a new crime or infraction, eliminates a crime or infraction, or changes the penalty for a crime or infraction, within the meaning of Section 17556 of the Government Code, or changes the definition of a crime within the meaning of Section 6 of Article XIII B of the California Constitution.

SEC. 5. The Legislature finds and declares that Sections 1 and 2 of this act amending, repealing, and adding Section 65852.2 of the Government Code addresses a matter of statewide concern rather than a municipal affair, as that term is used in Section 5 of Article XI of the California Constitution. Therefore, Section 1 of this act applies to all cities, including charter cities.

O

California LEGISLATIVE INFORMATION

Home | Bill Information | California Law | Publications | Other Resources | My Subscriptions | My Favorites

AB-68 Land use: accessory dwelling units. (2019-2020)

SHARE THIS:

Date Published: 10/10/2019 09:00 PM

Assembly Bill No. 68

CHAPTER 655

An act to amend Sections 65852.2 and 65852.22 of the Government Code, relating to land use.

[Approved by Governor October 09, 2019. Filed with Secretary of State October 09, 2019.]

LEGISLATIVE COUNSEL'S DIGEST

AB 68, Ting. Land use: accessory dwelling units.

(1) The Planning and Zoning Law authorizes a local agency to provide, by ordinance, for the creation of accessory dwelling units in single-family and multifamily residential zones and requires such an ordinance to impose standards on accessory dwelling units, including, among others, lot coverage. Existing law also requires such an ordinance to require the accessory dwelling units to be either attached to, or located within, the living area of the proposed or existing primary dwelling, or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

This bill would delete the provision authorizing the imposition of standards on lot coverage and would prohibit an ordinance from imposing requirements on minimum lot size. The bill would revise the requirements for an accessory dwelling unit by providing that the accessory dwelling unit may be attached to, or located within, an attached garage, storage area, or an accessory structure, as defined.

(2) Existing law requires a local agency to ministerially approve or deny a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit within 120 days of receiving the application.

This bill would instead require a local agency to ministerially approve or deny a permit application for the creation of an accessory dwelling unit or junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot, and would authorize the permitting agency to delay acting on the permit application if the permit application is submitted with a permit application to create a new single-family or multifamily dwelling on the lot, as specified.

(3) Existing law prohibits the establishment by ordinance of minimum or maximum size for an accessory dwelling unit, or size based upon a percentage of the proposed or existing primary dwelling, if the limitations do not permit at least an efficiency unit to be constructed.

This bill would instead prohibit the imposition of those limitations if they do not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with 4-foot side and rear yard setbacks to be constructed. This bill would additionally prohibit the imposition of limits on lot coverage, floor area ratio, open space, and minimum lot size if they prohibit the construction of an accessory dwelling unit meeting those specifications.

(4) Existing law requires ministerial approval of a building permit to create within a zone for single-family use one accessory dwelling unit per single-family lot, subject to specified conditions and requirements.

This bill would instead require ministerial approval of an application for a building permit within a residential or mixed-use zone to create the following: (1) one accessory dwelling unit and one junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if certain requirements are met; (2) a detached, new construction accessory dwelling unit that meets certain requirements and would authorize a local agency to impose specified conditions relating to floor area and height on that unit; (3) multiple accessory dwelling units within the portions of an existing multifamily dwelling structure provided those units meet certain requirements; or (4) not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to certain height and rear yard and side setback requirements.

(5) Existing law requires a local agency to submit its accessory dwelling unit ordinance to the Department of Housing and Community Development within 60 days after adoption and authorizes the department to review and comment on the ordinance.

This bill would instead authorize the department to submit written findings to a local agency as to whether the local ordinance complies with state law, and would require the local agency to consider the department's findings and to amend its ordinance to comply with state law or adopt a resolution with specified findings. The bill would require the department to notify the Attorney General that the local agency is in violation of state law if the local agency does not amend its ordinance or adopt a resolution with specified findings.

(6) This bill would also prohibit a local agency from issuing a certificate of occupancy for an accessory dwelling unit before issuing a certificate of occupancy for the primary residence.

(7) This bill would require a local agency that has not adopted an ordinance for the creation of junior accessory dwelling units to apply the same standards established by this bill for local agencies with ordinances.

(8) This bill would make other conforming changes, including revising definitions and changes clarifying that the above-specified provisions regulating accessory dwelling units and junior accessory dwelling units also apply to the creation of accessory dwelling units and junior accessory dwelling units on proposed structures to be constructed.

(9) This bill would incorporate additional changes to Section 65852.2 of the Government Code proposed by AB 881 and SB 13 to be operative only if this bill and either or both AB 881 and SB 13 are enacted and this bill is enacted last.

(10) The California Constitution requires the state to reimburse local agencies and school districts for certain costs mandated by the state. Statutory provisions establish procedures for making that reimbursement.

This bill would provide that no reimbursement is required by this act for a specified reason.

Vote: majority Appropriation: no Fiscal Committee: yes Local Program: yes

THE PEOPLE OF THE STATE OF CALIFORNIA DO ENACT AS FOLLOWS:

SECTION 1. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on criteria that may include, but are not limited to, the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Places. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily use and includes a proposed or existing single-family dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas, or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to a unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application to create an accessory dwelling unit or a junior accessory dwelling unit shall be considered ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs that it incurs as a result of amendments to this paragraph enacted during the 2001–02 Regular Session of the Legislature, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot zoned for residential use that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed, except that a local agency may require an applicant for a permit issued pursuant to this subdivision to be an owner-occupant or that the property be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit and one junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency may require owner occupancy for either the primary dwelling or the accessory dwelling unit on a single-family lot, subject to the requirements of paragraph (6) of subdivision (a).

(5) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(6) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last 5 years, or, if the

percolation test has been recertified, within the last 10 years.

(7) Notwithstanding subdivision (c) and paragraph (1), a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards, including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) Accessory dwelling units shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(A) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family home.

(B) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its size or the number of its plumbing fixtures, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with this section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms apply:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary residence. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit, as defined in Section 17958.1 of the Health and Safety Code.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Living area" means the interior habitable area of a dwelling unit, including basements and attics but does not include a garage or any accessory structure.

(4) "Local agency" means a city, county, or city and county, whether general law or chartered.

(5) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(6) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(7) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(8) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(9) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

SEC. 1.1. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. A local agency that does not provide water or sewer services shall consult with the local water or sewer service provider regarding the adequacy of water and sewer services before designating an area where accessory dwelling units may be permitted.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily use and includes a proposed or existing single-family dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas, or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to a unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application to create an accessory dwelling unit or a junior accessory dwelling unit shall be considered ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs that it incurs as a result of amendments to this paragraph enacted during the 2001–02 Regular Session of the Legislature, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency

has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot zoned for residential use that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed, including an owner-occupant requirement, except that a local agency may require the property to be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit and one junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(5) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last 5 years, or, if the percolation test has been recertified, within the last 10 years.

(6) Notwithstanding subdivision (c) and paragraph (1), a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards, including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) Accessory dwelling units shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(A) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family home.

(B) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its size or the number of its plumbing fixtures, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with this section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms apply:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary residence. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit, as defined in Section 17958.1 of the Health and Safety Code.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Living area" means the interior habitable area of a dwelling unit, including basements and attics but does not include a garage or any accessory structure.

(4) "Local agency" means a city, county, or city and county, whether general law or chartered.

(5) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(6) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(7) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(8) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(9) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) This section shall remain in effect until January 1, 2025, and as of that date is repealed.

SEC. 1.2. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on criteria that may include, but are not limited to, the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from

the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed, including any owner-occupant requirement, except that a local agency may require that the property be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and may shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(5) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last 5 years, or, if the percolation test has been recertified, within the last 10 years.

(6) Notwithstanding subdivision (c) and paragraph (1), a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards, including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall remain in effect only until January 1, 2025, and as of that date is repealed.

SEC. 1.3. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. A local agency that does not provide water or sewer services shall consult with the local water or sewer service provider regarding the adequacy of water and sewer services before designating an area where accessory dwelling units may be permitted.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed, including any owner-occupant requirement, except that a local agency may require that the property be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and may shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(5) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last 5 years, or, if the percolation test has been recertified, within the last 10 years.

(6) Notwithstanding subdivision (c) and paragraph (1), a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards, including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an

ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with proposed or existing primary residence. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall remain in effect only until January 1, 2025, and as of that date is repealed.

SEC. 2. Section 65852.22 of the Government Code is amended to read:

65852.22. (a) Notwithstanding Section 65852.2, a local agency may, by ordinance, provide for the creation of junior accessory dwelling units in single-family residential zones. The ordinance may require a permit to be obtained for the creation of a junior accessory dwelling unit, and shall do all of the following:

(1) Limit the number of junior accessory dwelling units to one per residential lot zoned for single-family residences with a single-family residence built, or proposed to be built, on the lot.

(2) Require owner-occupancy in the single-family residence in which the junior accessory dwelling unit will be permitted. The owner may reside in either the remaining portion of the structure or the newly created junior accessory dwelling unit. Owner-occupancy shall not be required if the owner is another governmental agency, land trust, or housing organization.

(3) Require the recordation of a deed restriction, which shall run with the land, shall be filed with the permitting agency, and shall include both of the following:

(A) A prohibition on the sale of the junior accessory dwelling unit separate from the sale of the single-family residence, including a statement that the deed restriction may be enforced against future purchasers.

(B) A restriction on the size and attributes of the junior accessory dwelling unit that conforms with this section.

(4) Require a permitted junior accessory dwelling unit to be constructed within the walls of the proposed or existing single-family residence.

(5) Require a permitted junior accessory dwelling to include a separate entrance from the main entrance to the proposed or existing single-family residence.

(6) Require the permitted junior accessory dwelling unit to include an efficiency kitchen, which shall include all of the following:

(A) A cooking facility with appliances.

(B) A food preparation counter and storage cabinets that are of reasonable size in relation to the size of the junior accessory dwelling unit.

(b) (1) An ordinance shall not require additional parking as a condition to grant a permit.

(2) This subdivision shall not be interpreted to prohibit the requirement of an inspection, including the imposition of a fee for that inspection, to determine if the junior accessory dwelling unit complies with applicable building standards.

(c) An application for a permit pursuant to this section shall, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits, be considered ministerially, without discretionary review or a hearing. The permitting agency shall act on the application to create a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family dwelling on the lot. If the permit application to create a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse the local agency for costs incurred in connection with the issuance of a permit pursuant to this section.

(d) For purposes of any fire or life protection ordinance or regulation, a junior accessory dwelling unit shall not be considered a separate or new dwelling unit. This section shall not be construed to prohibit a city, county, city and county, or other local public entity from adopting an ordinance or regulation relating to fire and life protection requirements within a single-family residence that contains a junior accessory dwelling unit so long as the ordinance or regulation applies uniformly to all single-family residences within the zone regardless of whether the single-family residence includes a junior accessory dwelling unit or not.

(e) For purposes of providing service for water, sewer, or power, including a connection fee, a junior accessory dwelling unit shall not be considered a separate or new dwelling unit.

(f) This section shall not be construed to prohibit a local agency from adopting an ordinance or regulation, related to parking or a service or a connection fee for water, sewer, or power, that applies to a single-family residence that contains a junior accessory dwelling unit, so long as that ordinance or regulation applies uniformly to all single-family residences regardless of whether the single-family residence includes a junior accessory dwelling unit.

(g) If a local agency has not adopted a local ordinance pursuant to this section, the local agency shall ministerially approve a permit to construct a junior accessory dwelling unit that satisfies the requirements set forth in subparagraph (A) of paragraph (1) of subdivision (e) of Section 65852.2 and the requirements of this section.

(h) For purposes of this section, the following terms have the following meanings:

(1) "Junior accessory dwelling unit" means a unit that is no more than 500 square feet in size and contained entirely within a single-family residence. A junior accessory dwelling unit may include separate sanitation facilities, or may share sanitation facilities with the existing structure.

(2) "Local agency" means a city, county, or city and county, whether general law or chartered.

SEC. 3. (a) Section 1.1 of this bill incorporates certain amendments to Section 65852.2 of the Government Code proposed by both this bill and Assembly Bill 881. That section of this bill shall only become operative if (1) both bills are enacted and become effective on or before January 1, 2020, (2) each bill amends Section 65852.2 of the Government Code, and (3) Senate Bill 13 is not enacted or as enacted does not amend that section, and (4) this bill is enacted after Assembly Bill 881, in which case Sections 1, 1.2, and 1.3 of this bill shall not become operative.

(b) Section 1.2 of this bill incorporates certain amendments to Section 65852.2 of the Government Code proposed by both this bill and Senate Bill 13. That section of this bill shall only become operative if (1) both bills are enacted and become effective on or before January 1, 2020, (2) each bill amends Section 65852.2 of the Government Code, (3) Assembly Bill 881 is not enacted or as enacted does not amend that section, and (4) this bill is enacted after Senate Bill 13 in which case Sections 1, 1.1, and 1.3 of this bill shall not become operative.

(c) Section 1.3 of this bill incorporates certain amendments to Section 65852.2 of the Government Code proposed by this bill, Assembly Bill 881, and Senate Bill 13. That section of this bill shall only become operative if

(1) all three bills are enacted and become effective on or before January 1, 2020, (2) all three bills amend Section 65852.2 of the Government Code, and (3) this bill is enacted after Assembly Bill 881 and Senate Bill 13, in which case Sections 1, 1.1, and 1.2 of this bill shall not become operative.

SEC. 4. No reimbursement is required by this act pursuant to Section 6 of Article XIII B of the California Constitution because a local agency or school district has the authority to levy service charges, fees, or assessments sufficient to pay for the program or level of service mandated by this act, within the meaning of Section 17556 of the Government Code.

California LEGISLATIVE INFORMATION

Home | Bill Information | California Law | Publications | Other Resources | My Subscriptions | My Favorites

SB-13 Accessory dwelling units. (2019-2020)

SHARE THIS:

Date Published: 10/10/2019 09:00 PM

Senate Bill No. 13

CHAPTER 653

An act to amend, repeal, and add Section 65852.2 of the Government Code, and to add and repeal Section 17980.12 of the Health and Safety Code, relating to land use.

[Approved by Governor October 09, 2019. Filed with Secretary of State October 09, 2019.]

LEGISLATIVE COUNSEL'S DIGEST

SB 13, Wieckowski. Accessory dwelling units.

(1) The Planning and Zoning Law authorizes a local agency, by ordinance, or, if a local agency has not adopted an ordinance, by ministerial approval, to provide for the creation of accessory dwelling units in single-family and multifamily residential zones in accordance with specified standards and conditions. Existing law requires any ordinance adopted by a local agency to comply with certain criteria, including that it require accessory dwelling units to be either attached to, or located within, the proposed or existing primary dwelling or detached if located within the same lot, and that it does not exceed a specified amount of total area of floor space.

This bill would, instead, authorize the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The bill would also revise the requirements for an accessory dwelling unit by providing that the accessory dwelling unit may be attached to, or located within, an attached garage, storage area, or other structure, and that it does not exceed a specified amount of total floor area.

(2) Existing law generally authorizes a local agency to include in the ordinance parking standards for accessory dwelling units, including authorizing a local agency to require the replacement of parking spaces if a garage, carport, or covered parking is demolished to construct an accessory dwelling unit. Existing law also prohibits a local agency from imposing parking standards on an accessory dwelling unit if it is located within one-half mile of public transit.

This bill would, instead, prohibit a local agency from requiring the replacement of parking spaces if a garage, carport, or covered parking is demolished to construct an accessory dwelling unit. The bill would also prohibit a local agency from imposing parking standards on an accessory dwelling unit that is located within one-half mile walking distance of public transit, and would define the term “public transit” for those purposes.

(3) Existing law authorizes a local agency to establish minimum and maximum unit size limitations on accessory dwelling units, provided that the ordinance permits an efficiency unit to be constructed in compliance with local development standards.

This bill would prohibit a local agency from establishing a minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit, as defined. The bill would also prohibit a local agency from establishing a maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than 850 square feet, and 1,000 square feet if the accessory

dwelling unit contains more than one bedroom. The bill would also instead prohibit a local agency from establishing any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size for either attached or detached dwelling units that prohibit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height and with a 4-foot side and rear yard setbacks.

(4) Existing law prohibits a local agency from utilizing standards to evaluate a proposed accessory dwelling unit on a lot that is zoned for residential use that includes a proposed or existing single-family dwelling other than the criteria described above, except that, among one other exception, a local agency may require an applicant for a permit to be an owner-occupant of either the primary or accessory dwelling unit as a condition of issuing a permit.

This bill, until January 1, 2025, would instead prohibit a local agency from imposing an owner-occupant requirement as described above.

(5) Existing law requires a local agency that has not adopted an ordinance governing accessory dwelling units to approve or disapprove the application ministerially and without discretionary review within 120 days after receiving the application.

The bill would require a local agency, whether or not it has adopted an ordinance, to consider and approve an application, ministerially and without discretionary review, within 60 days after receiving a completed application. The bill would also provide that, if a local agency does not act on the application within that time period, the application shall be deemed approved.

(6) Existing law requires fees for an accessory dwelling unit to be determined in accordance with the Mitigation Fee Act. Existing law also requires the connection fee or capacity charge for an accessory dwelling unit requiring a new or separate utility connection to be based on either the accessory dwelling unit's size or the number of its plumbing fixtures.

This bill would prohibit a local agency, special district, or water corporation from imposing any impact fee, as specified, upon the development of an accessory dwelling unit less than 750 square feet, and would require any impact fees to be charged for an accessory dwelling unit of 750 square feet or more to be proportional to the square footage of the primary dwelling unit. The bill would revise the basis for calculating the connection fee or capacity charge specified above to either the accessory dwelling unit's square feet or the number of its drainage fixture unit values, as specified.

(7) Existing law, for purposes of these provisions, defines "living area" as the interior habitable area of a dwelling unit including basements and attics, but not a garage or accessory structure.

This bill would define "accessory structure" to mean a structure that is accessory and incidental to a dwelling located on the same lot.

(8) Existing law requires a local agency to submit a copy of the adopted ordinance to the Department of Housing and Community Development and authorizes the department to review and comment on the ordinance.

This bill would instead authorize the department to submit written findings to the local agency as to whether the ordinance complies with the statute authorizing the creation of an accessory dwelling unit, and, if the department finds that the local agency's ordinance does not comply with those provisions, would require the department to notify the local agency within a reasonable time. The bill would require the local agency to consider the department's findings and either amend its ordinance to comply with those provisions or adopt it without changes and include specified findings. If the local agency does not amend it ordinance or does not adopt those findings, the bill would require the department to notify the local agency and authorize it to notify the Attorney General that the local agency is in violation of state law, as provided. The bill would authorize the department to adopt guidelines to implement uniform standards or criteria to supplement or clarify the provisions authorizing accessory dwelling units.

(9) Existing law requires the planning agency of each city and county to adopt a general plan that includes a housing element that identifies adequate sites for housing. Existing law authorizes the department to allow a city or county to do so by a variety of methods and also authorizes the department to allow a city or county to identify sites for accessory dwelling units, as specified.

This bill would state that a local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing in accordance with those provisions.

(10) Existing law, the State Housing Law, a violation of which is a crime, establishes statewide construction and occupancy standards for buildings used for human habitation. Existing law requires, for those purposes, that any building, including any dwelling unit, be deemed to be a substandard building when a health officer determines that any one of specified listed conditions exists to the extent that it endangers the life, limb, health, property, safety, or welfare of the public or its occupants.

This bill would authorize the owner of an accessory dwelling unit built before January 1, 2020, or built on or after January 1, 2020, under specified circumstances, that receives a notice to correct violations or abate nuisances to request that the enforcement of the violation be delayed for 5 years if correcting the violation is not necessary to protect health and safety, as determined by the enforcement agency, subject to specified requirements. The bill would make conforming and other changes relating to the creation of accessory dwelling units.

By increasing the duties of local agencies with respect to land use regulations, and because the bill would expand the scope of a crime under the State Housing Law, the bill would impose a state-mandated local program.

(11) This bill would incorporate additional changes to Section 65852.2 of the Government Code proposed by AB 68 and AB 881 to be operative only if this bill and either or both AB 68 and AB 881 are enacted and this bill is enacted last.

(12) The California Constitution requires the state to reimburse local agencies and school districts for certain costs mandated by the state. Statutory provisions establish procedures for making that reimbursement.

This bill would provide that no reimbursement is required by this act for a specified reason.

Vote: majority Appropriation: no Fiscal Committee: yes Local Program: yes

THE PEOPLE OF THE STATE OF CALIFORNIA DO ENACT AS FOLLOWS:

SECTION 1. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on criteria that may include, but are not limited to, the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, lot coverage, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) The total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the proposed or existing primary dwelling living area or 1,200 square feet.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing garage that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than five feet from the side and rear lot lines shall be required for an accessory dwelling unit that is constructed above a garage.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. In the event that a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be utilized or imposed, including any owner-occupant requirement, except that a local agency may require that the property be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is

located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit within 60 days from the date the local agency receives a completed application. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit to create one accessory dwelling unit per lot if the unit is contained within the existing space of a single-family residence or accessory structure, has independent exterior access from the existing residence, and the side and rear setbacks are sufficient for fire safety. Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for the purposes of calculating connection fees or capacity charges for utilities, including water and sewer service.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does

not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge.

(5) For an accessory dwelling unit that is not described in subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit which provides complete independent living facilities for one or more persons. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family dwelling is situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(8) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(9) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(l) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(m) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(n) This section shall remain in effect only until January 1, 2025, and as of that date is repealed.

SEC. 1.1. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on criteria that may include, but are not limited to, the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that

ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed, including any owner-occupant requirement, except that a local agency may require that the property be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and may shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(5) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(6) Notwithstanding subdivision (c) and paragraph (1) a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted

pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall remain in effect only until January 1, 2025, and as of that date is repealed.

SEC. 1.2. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. A local agency that does not provide water or sewer services shall consult with the local water or sewer service provider regarding the adequacy of water and sewer services before designating an area where accessory dwelling units may be permitted.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed, including any owner-occupant requirement, except that a local agency may require that the property be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the

accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and may shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(5) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(6) Notwithstanding subdivision (c) and paragraph (1) a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary residence. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall remain in effect only until January 1, 2025, and as of that date is repealed.

SEC. 1.3. Section 65852.2 of the Government Code is amended to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on criteria that may include the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. A local agency that does not provide water or sewer services shall consult with the local water or sewer service provider regarding the adequacy of water and sewer services before designating an area where accessory dwelling units may be permitted.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed, including any owner-occupant requirement, except that a local agency may require that the property be used for rentals of terms longer than 30 days.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and may shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(5) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(6) Notwithstanding subdivision (c) and paragraph (1) a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall remain in effect only until January 1, 2025, and as of that date is repealed.

SEC. 2. Section 65852.2 is added to the Government Code, to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on criteria that may include, but are not limited to, the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, lot coverage, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) The total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the proposed or existing primary dwelling living area or 1,200 square feet.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing garage that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than five feet from the side and rear lot lines shall be required for an accessory dwelling unit that is constructed above a garage.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. In the event that a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) (A) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be utilized or imposed, except that, subject to subparagraph (B), a local agency may require an applicant for a permit issued pursuant to this subdivision to be an owner-occupant or that the property be used for rentals of terms longer than 30 days.

(B) Notwithstanding subparagraph (A), a local agency shall not impose an owner-occupant requirement on an accessory dwelling unit permitted between January 1, 2020 to January 1, 2025, during which time the local agency was prohibited from imposing an owner-occupant requirement.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit within 60 days from the date the local agency receives a completed application. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit to create one accessory dwelling unit per lot if the unit is contained within the existing space of a single-family residence or accessory structure, has independent exterior access from the existing residence, and the side and rear setbacks are sufficient for fire safety. Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence. A city may require owner occupancy for either the primary or the accessory dwelling unit created through this process.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for the purposes of calculating connection fees or capacity charges for utilities, including water and sewer service.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge.

(5) For an accessory dwelling unit that is not described in subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider findings made by the department pursuant to subparagraph (A) and shall do either one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit which provides complete independent living facilities for one or more persons. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family dwelling is situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(8) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(9) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(l) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(m) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2), a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(n) This section shall become operative on January 1, 2025.

SEC. 2.1. Section 65852.2 is added to the Government Code, to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on criteria that may include, but are not limited to, the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) (A) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed except that, subject to subparagraph (B), a local agency may require an applicant for a permit issued pursuant to this subdivision to be an owner-occupant or that the property be used for rentals of terms longer than 30 days.

(B) Notwithstanding subparagraph (A), a local agency shall not impose an owner-occupant requirement on an accessory dwelling unit permitted between January 1, 2020 to January 1, 2025, during which time the local agency was prohibited from imposing an owner-occupant requirement.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is

located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and may shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency may require owner occupancy for either the primary dwelling or the accessory dwelling unit on a single-family lot, subject to the requirements of paragraph (6) of subdivision (a).

(5) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(6) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(7) Notwithstanding subdivision (c) and paragraph (1) a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall become operative on January 1, 2025.

SEC. 2.2. Section 65302.2 is added to the Government Code, to read:

65302.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. A local agency that does not provide water or sewer services shall consult with the local water or sewer service provider regarding the adequacy of water and sewer services before designating an area where accessory dwelling units may be permitted.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until

the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) (A) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed except that, subject to subparagraph (B), a local agency may require an applicant for a permit issued pursuant to this subdivision to be an owner-occupant or that the property be used for rentals of terms longer than 30 days.

(B) Notwithstanding subparagraph (A), a local agency shall not impose an owner-occupant requirement on an accessory dwelling unit permitted between January 1, 2020 to January 1, 2025, during which time the local agency was prohibited from imposing an owner-occupant requirement.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and may shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency may require owner occupancy for either the primary dwelling or the accessory dwelling unit on a single-family lot, subject to the requirements of paragraph (6) of subdivision (a).

(5) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(6) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(7) Notwithstanding subdivision (c) and paragraph (1) a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons and is located on a lot with a proposed or existing primary residence. It shall include permanent provisions for living, sleeping, eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources

Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall become operative on January 1, 2025.

SEC. 2.3. Section 65852.2 is added to the Government Code, to read:

65852.2. (a) (1) A local agency may, by ordinance, provide for the creation of accessory dwelling units in areas zoned to allow single-family or multifamily dwelling residential use. The ordinance shall do all of the following:

(A) Designate areas within the jurisdiction of the local agency where accessory dwelling units may be permitted. The designation of areas may be based on criteria that may include the adequacy of water and sewer services and the impact of accessory dwelling units on traffic flow and public safety. A local agency that does not provide water or sewer services shall consult with the local water or sewer service provider regarding the adequacy of water and sewer services before designating an area where accessory dwelling units may be permitted.

(B) (i) Impose standards on accessory dwelling units that include, but are not limited to, parking, height, setback, landscape, architectural review, maximum size of a unit, and standards that prevent adverse impacts on any real property that is listed in the California Register of Historic Resources. These standards shall not include requirements on minimum lot size.

(ii) Notwithstanding clause (i), a local agency may reduce or eliminate parking requirements for any accessory dwelling unit located within its jurisdiction.

(C) Provide that accessory dwelling units do not exceed the allowable density for the lot upon which the accessory dwelling unit is located, and that accessory dwelling units are a residential use that is consistent with the existing general plan and zoning designation for the lot.

(D) Require the accessory dwelling units to comply with all of the following:

(i) The accessory dwelling unit may be rented separate from the primary residence, but may not be sold or otherwise conveyed separate from the primary residence.

(ii) The lot is zoned to allow single-family or multifamily dwelling residential use and includes a proposed or existing dwelling.

(iii) The accessory dwelling unit is either attached to, or located within, the proposed or existing primary dwelling, including attached garages, storage areas or similar uses, or an accessory structure or detached from the proposed or existing primary dwelling and located on the same lot as the proposed or existing primary dwelling.

(iv) If there is an existing primary dwelling, the total floor area of an attached accessory dwelling unit shall not exceed 50 percent of the existing primary dwelling.

(v) The total floor area for a detached accessory dwelling unit shall not exceed 1,200 square feet.

(vi) No passageway shall be required in conjunction with the construction of an accessory dwelling unit.

(vii) No setback shall be required for an existing living area or accessory structure or a structure constructed in the same location and to the same dimensions as an existing structure that is converted to an accessory dwelling unit or to a portion of an accessory dwelling unit, and a setback of no more than four feet from the side and rear lot lines shall be required for an accessory dwelling unit that is not converted from an existing structure or a new structure constructed in the same location and to the same dimensions as an existing structure.

(viii) Local building code requirements that apply to detached dwellings, as appropriate.

(ix) Approval by the local health officer where a private sewage disposal system is being used, if required.

(x) (I) Parking requirements for accessory dwelling units shall not exceed one parking space per accessory dwelling unit or per bedroom, whichever is less. These spaces may be provided as tandem parking on a driveway.

(II) Offstreet parking shall be permitted in setback areas in locations determined by the local agency or through tandem parking, unless specific findings are made that parking in setback areas or tandem parking is not feasible based upon specific site or regional topographical or fire and life safety conditions.

(III) This clause shall not apply to an accessory dwelling unit that is described in subdivision (d).

(xi) When a garage, carport, or covered parking structure is demolished in conjunction with the construction of an accessory dwelling unit or converted to an accessory dwelling unit, the local agency shall not require that those offstreet parking spaces be replaced.

(xii) Accessory dwelling units shall not be required to provide fire sprinklers if they are not required for the primary residence.

(2) The ordinance shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(3) A permit application for an accessory dwelling unit or a junior accessory dwelling unit shall be considered and approved ministerially without discretionary review or a hearing, notwithstanding Section 65901 or 65906 or any local ordinance regulating the issuance of variances or special use permits. The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall be considered without discretionary review or hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. A local agency may charge a fee to reimburse it for costs incurred to implement this paragraph, including the costs of adopting or amending any ordinance that provides for the creation of an accessory dwelling unit.

(4) An existing ordinance governing the creation of an accessory dwelling unit by a local agency or an accessory dwelling ordinance adopted by a local agency shall provide an approval process that includes only ministerial provisions for the approval of accessory dwelling units and shall not include any discretionary processes, provisions, or requirements for those units, except as otherwise provided in this subdivision. If a local agency has an existing accessory dwelling unit ordinance that fails to meet the requirements of this subdivision, that ordinance shall be null and void and that agency shall thereafter apply the standards established in this subdivision for the approval of accessory dwelling units, unless and until the agency adopts an ordinance that complies with this section.

(5) No other local ordinance, policy, or regulation shall be the basis for the delay or denial of a building permit or a use permit under this subdivision.

(6) (A) This subdivision establishes the maximum standards that local agencies shall use to evaluate a proposed accessory dwelling unit on a lot that includes a proposed or existing single-family dwelling. No additional standards, other than those provided in this subdivision, shall be used or imposed except, subject to subparagraph (B), that a local agency may require an applicant for a permit issued pursuant to this subdivision to be an owner-occupant or that the property be used for rentals of terms longer than 30 days.

(B) Notwithstanding subparagraph (A), a local agency shall not impose an owner-occupant requirement on an accessory dwelling unit permitted between January 1, 2020 to January 1, 2025, during which time the local

agency was prohibited from imposing an owner-occupant requirement.

(7) A local agency may amend its zoning ordinance or general plan to incorporate the policies, procedures, or other provisions applicable to the creation of an accessory dwelling unit if these provisions are consistent with the limitations of this subdivision.

(8) An accessory dwelling unit that conforms to this subdivision shall be deemed to be an accessory use or an accessory building and shall not be considered to exceed the allowable density for the lot upon which it is located, and shall be deemed to be a residential use that is consistent with the existing general plan and zoning designations for the lot. The accessory dwelling unit shall not be considered in the application of any local ordinance, policy, or program to limit residential growth.

(b) When a local agency that has not adopted an ordinance governing accessory dwelling units in accordance with subdivision (a) receives an application for a permit to create an accessory dwelling unit pursuant to this subdivision, the local agency shall approve or disapprove the application ministerially without discretionary review pursuant to subdivision (a). The permitting agency shall act on the application to create an accessory dwelling unit or a junior accessory dwelling unit within 60 days from the date the local agency receives a completed application if there is an existing single-family or multifamily dwelling on the lot. If the permit application to create an accessory dwelling unit or a junior accessory dwelling unit is submitted with a permit application to create a new single-family dwelling on the lot, the permitting agency may delay acting on the permit application for the accessory dwelling unit or the junior accessory dwelling unit until the permitting agency acts on the permit application to create the new single-family dwelling, but the application to create the accessory dwelling unit or junior accessory dwelling unit shall still be considered ministerially without discretionary review or a hearing. If the applicant requests a delay, the 60-day time period shall be tolled for the period of the delay. If the local agency has not acted upon the completed application within 60 days, the application shall be deemed approved.

(c) (1) Subject to paragraph (2), a local agency may establish minimum and maximum unit size requirements for both attached and detached accessory dwelling units.

(2) Notwithstanding paragraph (1), a local agency shall not establish by ordinance any of the following:

(A) A minimum square footage requirement for either an attached or detached accessory dwelling unit that prohibits an efficiency unit.

(B) A maximum square footage requirement for either an attached or detached accessory dwelling unit that is less than either of the following:

(i) 850 square feet.

(ii) 1,000 square feet for an accessory dwelling unit that provides more than one bedroom.

(C) Any other minimum or maximum size for an accessory dwelling unit, size based upon a percentage of the proposed or existing primary dwelling, or limits on lot coverage, floor area ratio, open space, and minimum lot size, for either attached or detached dwellings that does not permit at least an 800 square foot accessory dwelling unit that is at least 16 feet in height with four-foot side and rear yard setbacks to be constructed in compliance with all other local development standards.

(d) Notwithstanding any other law, a local agency, whether or not it has adopted an ordinance governing accessory dwelling units in accordance with subdivision (a), shall not impose parking standards for an accessory dwelling unit in any of the following instances:

(1) The accessory dwelling unit is located within one-half mile walking distance of public transit.

(2) The accessory dwelling unit is located within an architecturally and historically significant historic district.

(3) The accessory dwelling unit is part of the proposed or existing primary residence or an accessory structure.

(4) When on-street parking permits are required but not offered to the occupant of the accessory dwelling unit.

(5) When there is a car share vehicle located within one block of the accessory dwelling unit.

(e) (1) Notwithstanding subdivisions (a) to (d), inclusive, a local agency shall ministerially approve an application for a building permit within a residential or mixed-use zone to create any of the following:

(A) One accessory dwelling unit or junior accessory dwelling unit per lot with a proposed or existing single-family dwelling if all of the following apply:

(i) The accessory dwelling unit or junior accessory dwelling unit is within the proposed space of a single-family dwelling or existing space of a single-family dwelling or accessory structure and may include an expansion of not more than 150 square feet beyond the same physical dimensions as the existing accessory structure. An expansion beyond the physical dimensions of the existing accessory structure shall be limited to accommodating ingress and egress.

(ii) The space has exterior access from the proposed or existing single-family dwelling.

(iii) The side and rear setbacks are sufficient for fire and safety.

(iv) The junior accessory dwelling unit complies with the requirements of Section 65852.22.

(B) One detached, new construction, accessory dwelling unit that does not exceed four-foot side and rear yard setbacks for a lot with a proposed or existing single-family dwelling. The accessory dwelling unit may be combined with a junior accessory dwelling unit described in subparagraph (A). A local agency may impose the following conditions on the accessory dwelling unit:

(i) A total floor area limitation of not more than 800 square feet.

(ii) A height limitation of 16 feet.

(C) (i) Multiple accessory dwelling units within the portions of existing multifamily dwelling structures that are not used as livable space, including, but not limited to, storage rooms, boiler rooms, passageways, attics, basements, or garages, if each unit complies with state building standards for dwellings.

(ii) A local agency shall allow at least one accessory dwelling unit within an existing multifamily dwelling and may shall allow up to 25 percent of the existing multifamily dwelling units.

(D) Not more than two accessory dwelling units that are located on a lot that has an existing multifamily dwelling, but are detached from that multifamily dwelling and are subject to a height limit of 16 feet and four-foot rear yard and side setbacks.

(2) A local agency shall not require, as a condition for ministerial approval of a permit application for the creation of an accessory dwelling unit or a junior accessory dwelling unit, the correction of nonconforming zoning conditions.

(3) The installation of fire sprinklers shall not be required in an accessory dwelling unit if sprinklers are not required for the primary residence.

(4) A local agency may require owner occupancy for either the primary dwelling or the accessory dwelling unit on a single-family lot, subject to the requirements of paragraph (6) of subdivision (a).

(5) A local agency shall require that a rental of the accessory dwelling unit created pursuant to this subdivision be for a term longer than 30 days.

(6) A local agency may require, as part of the application for a permit to create an accessory dwelling unit connected to an onsite water treatment system, a percolation test completed within the last five years, or, if the percolation test has been recertified, within the last 10 years.

(7) Notwithstanding subdivision (c) and paragraph (1) a local agency that has adopted an ordinance by July 1, 2018, providing for the approval of accessory dwelling units in multifamily dwelling structures shall ministerially consider a permit application to construct an accessory dwelling unit that is described in paragraph (1), and may impose standards including, but not limited to, design, development, and historic standards on said accessory dwelling units. These standards shall not include requirements on minimum lot size.

(f) (1) Fees charged for the construction of accessory dwelling units shall be determined in accordance with Chapter 5 (commencing with Section 66000) and Chapter 7 (commencing with Section 66012).

(2) An accessory dwelling unit shall not be considered by a local agency, special district, or water corporation to be a new residential use for purposes of calculating connection fees or capacity charges for utilities, including water and sewer service, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(3) (A) A local agency, special district, or water corporation shall not impose any impact fee upon the development of an accessory dwelling unit less than 750 square feet. Any impact fees charged for an accessory dwelling unit of 750 square feet or more shall be charged proportionately in relation to the square footage of the primary dwelling unit.

(B) For purposes of this paragraph, "impact fee" has the same meaning as the term "fee" is defined in subdivision (b) of Section 66000, except that it also includes fees specified in Section 66477. "Impact fee" does not include any connection fee or capacity charge charged by a local agency, special district, or water corporation.

(4) For an accessory dwelling unit described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation shall not require the applicant to install a new or separate utility connection directly between the accessory dwelling unit and the utility or impose a related connection fee or capacity charge, unless the accessory dwelling unit was constructed with a new single-family dwelling.

(5) For an accessory dwelling unit that is not described in subparagraph (A) of paragraph (1) of subdivision (e), a local agency, special district, or water corporation may require a new or separate utility connection directly between the accessory dwelling unit and the utility. Consistent with Section 66013, the connection may be subject to a connection fee or capacity charge that shall be proportionate to the burden of the proposed accessory dwelling unit, based upon either its square feet or the number of its drainage fixture unit (DFU) values, as defined in the Uniform Plumbing Code adopted and published by the International Association of Plumbing and Mechanical Officials, upon the water or sewer system. This fee or charge shall not exceed the reasonable cost of providing this service.

(g) This section does not limit the authority of local agencies to adopt less restrictive requirements for the creation of an accessory dwelling unit.

(h) (1) A local agency shall submit a copy of the ordinance adopted pursuant to subdivision (a) to the Department of Housing and Community Development within 60 days after adoption. After adoption of an ordinance, the department may submit written findings to the local agency as to whether the ordinance complies with the section.

(2) (A) If the department finds that the local agency's ordinance does not comply with this section, the department shall notify the local agency and shall provide the local agency with a reasonable time, no longer than 30 days, to respond to the findings before taking any other action authorized by this section.

(B) The local agency shall consider the findings made by the department pursuant to subparagraph (A) and shall do one of the following:

(i) Amend the ordinance to comply with this section.

(ii) Adopt the ordinance without changes. The local agency shall include findings in its resolution adopting the ordinance that explain the reasons the local agency believes that the ordinance complies with this section despite the findings of the department.

(3) (A) If the local agency does not amend its ordinance in response to the department's findings or does not adopt a resolution with findings explaining the reason the ordinance complies with this section and addressing the department's findings, the department shall notify the local agency and may notify the Attorney General that the local agency is in violation of state law.

(B) Before notifying the Attorney General that the local agency is in violation of state law, the department may consider whether a local agency adopted an ordinance in compliance with this section between January 1, 2017, and January 1, 2020.

(i) The department may review, adopt, amend, or repeal guidelines to implement uniform standards or criteria that supplement or clarify the terms, references, and standards set forth in this section. The guidelines adopted pursuant to this subdivision are not subject to Chapter 3.5 (commencing with Section 11340) of Part 1 of Division 3 of Title 2.

(j) As used in this section, the following terms mean:

(1) "Accessory dwelling unit" means an attached or a detached residential dwelling unit that provides complete independent living facilities for one or more persons. It shall include permanent provisions for living, sleeping,

eating, cooking, and sanitation on the same parcel as the single-family or multifamily dwelling is or will be situated. An accessory dwelling unit also includes the following:

(A) An efficiency unit.

(B) A manufactured home, as defined in Section 18007 of the Health and Safety Code.

(2) "Accessory structure" means a structure that is accessory and incidental to a dwelling located on the same lot.

(3) "Efficiency unit" has the same meaning as defined in Section 17958.1 of the Health and Safety Code.

(4) "Living area" means the interior habitable area of a dwelling unit, including basements and attics, but does not include a garage or any accessory structure.

(5) "Local agency" means a city, county, or city and county, whether general law or chartered.

(6) "Neighborhood" has the same meaning as set forth in Section 65589.5.

(7) "Nonconforming zoning condition" means a physical improvement on a property that does not conform with current zoning standards.

(8) "Passageway" means a pathway that is unobstructed clear to the sky and extends from a street to one entrance of the accessory dwelling unit.

(9) "Proposed dwelling" means a dwelling that is the subject of a permit application and that meets the requirements for permitting.

(10) "Public transit" means a location, including, but not limited to, a bus stop or train station, where the public may access buses, trains, subways, and other forms of transportation that charge set fares, run on fixed routes, and are available to the public.

(11) "Tandem parking" means that two or more automobiles are parked on a driveway or in any other location on a lot, lined up behind one another.

(k) A local agency shall not issue a certificate of occupancy for an accessory dwelling unit before the local agency issues a certificate of occupancy for the primary dwelling.

(l) Nothing in this section shall be construed to supersede or in any way alter or lessen the effect or application of the California Coastal Act of 1976 (Division 20 (commencing with Section 30000) of the Public Resources Code), except that the local government shall not be required to hold public hearings for coastal development permit applications for accessory dwelling units.

(m) A local agency may count an accessory dwelling unit for purposes of identifying adequate sites for housing, as specified in subdivision (a) of Section 65583.1, subject to authorization by the department and compliance with this division.

(n) In enforcing building standards pursuant to Article 1 (commencing with Section 17960) of Chapter 5 of Part 1.5 of Division 13 of the Health and Safety Code for an accessory dwelling unit described in paragraph (1) or (2) below, a local agency, upon request of an owner of an accessory dwelling unit for a delay in enforcement, shall delay enforcement of a building standard, subject to compliance with Section 17980.12 of the Health and Safety Code:

(1) The accessory dwelling unit was built before January 1, 2020.

(2) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(o) This section shall become operative on January 1, 2025.

SEC. 3. Section 17980.12 is added to the Health and Safety Code, immediately following Section 17980.11, to read:

17980.12. (a) (1) An enforcement agency, until January 1, 2030, that issues to an owner of an accessory dwelling unit described in subparagraph (A) or (B) below, a notice to correct a violation of any provision of any building

standard pursuant to this part shall include in that notice a statement that the owner of the unit has a right to request a delay in enforcement pursuant to this subdivision:

(A) The accessory dwelling unit was built before January 1, 2020.

(B) The accessory dwelling unit was built on or after January 1, 2020, in a local jurisdiction that, at the time the accessory dwelling unit was built, had a noncompliant accessory dwelling unit ordinance, but the ordinance is compliant at the time the request is made.

(2) The owner of an accessory dwelling unit that receives a notice to correct violations or abate nuisances as described in paragraph (1) may, in the form and manner prescribed by the enforcement agency, submit an application to the enforcement agency requesting that enforcement of the violation be delayed for five years on the basis that correcting the violation is not necessary to protect health and safety.

(3) The enforcement agency shall grant an application described in paragraph (2) if the enforcement determines that correcting the violation is not necessary to protect health and safety. In making this determination, the enforcement agency shall consult with the entity responsible for enforcement of building standards and other regulations of the State Fire Marshal pursuant to Section 13146.

(4) The enforcement agency shall not approve any applications pursuant to this section on or after January 1, 2030. However, any delay that was approved by the enforcement agency before January 1, 2030, shall be valid for the full term of the delay that was approved at the time of the initial approval of the application pursuant to paragraph (3).

(b) For purposes of this section, "accessory dwelling unit" has the same meaning as defined in Section 65852.2.

(c) This section shall remain in effect only until January 1, 2035, and as of that date is repealed.

SEC. 4. (a) Sections 1.1 and 2.1 of this bill incorporate amendments to Section 65852.2 of the Government Code proposed by both this bill and Assembly Bill 68. Those sections of this bill shall only become operative if (1) both bills are enacted and become effective on or before January 1, 2020, (2) each bill amends and adds Section 65852.2 of the Government Code, (3) Assembly Bill 881 is not enacted or as enacted does not amend and add that section, and (4) this bill is enacted after Assembly Bill 68, in which case Sections 1, 1.2, 1.3, 2, 2.2, and 2.3 of this bill shall not become operative.

(b) Sections 1.2 and 2.2 of this bill incorporates amendments to Section 65852.2 of the Government Code proposed by both this bill and Assembly Bill 881. That section shall only become operative if (1) both bills are enacted and become effective on or before January 1, 2020, (2) each bill amends and adds Section 65852.2 of the Government Code, (3) Assembly Bill 68 is not enacted or as enacted does not amend and add that section, and (4) this bill is enacted after Assembly Bill 881 in which case Sections 1, 1.1, 1.3, 2, 2.1, and 2.3 of this bill shall not become operative.

(c) Sections 1.3 and 2.3 of this bill incorporates amendments to Section 65852.2 of the Government Code proposed by this bill, Assembly Bill 68, and Assembly Bill 881. That section shall only become operative if (1) all three bills are enacted and become effective on or before January 1, 2020, (2) all three bills amend and add Section 65852.2 of the Government Code, and (3) this bill is enacted after Assembly Bill 68 and Assembly Bill 881, in which case Sections 1, 1.1, 1.2, 2, 2.1, and 2.2 of this bill shall not become operative.

SEC. 5. No reimbursement is required by this act pursuant to Section 6 of Article XIII B of the California Constitution because a local agency or school district has the authority to levy service charges, fees, or assessments sufficient to pay for the program or level of service mandated by this act, within the meaning of Section 17556 of the Government Code.

Item No. 6C

Preliminary Discussion on a Zoning Code Amendment to Reduce Multi-Family Development Permit Requirements

CITY OF PACIFIC GROVE

300 Forest Avenue, Pacific Grove, California 93950

AGENDA REPORT

TO:	Chair Murphy and Members of the Planning Commission
FROM:	Alex Othon, Assistant Planner
MEETING DATE:	January 9, 2020
SUBJECT:	Preliminary Discussion on a Zoning Code amendment to reduce Multi-Family development permit requirements.
CEQA:	Not a "Project" under the California Environmental Quality Act (CEQA)

RECOMMENDATIONS

Receive as information, discuss, and provide guidance to staff.

DISCUSSION

In an effort to reduce barriers associated with multi-family development the Council adopted Housing Element identified programs to enact to facilitate the creation of more housing opportunities. Program 3.3c was identified to ease permitting requirements.

Program 3.3.c Use Permit for Multi-Family Development

The City currently has a Use Permit requirement for multi-family developments consisting of eight or more units in the City's multi-family zones (R-3 and R-4). While the City is relying heavily on mixed-use development in commercial zones to accommodate its need for lower-income households, several high-density residential opportunity sites allowing capacity above the seven unit threshold have been identified in the inventory. To ensure the City's permit process is not an unreasonable constraint on the potential development of these sites, the City will process a Zoning Code amendment to eliminate the Use Permit requirement for multi-family developments in the R-3 and R-4 zones.

An eight (8) unit multi-family development currently requires both an Architectural Permit and a Use Permit. The cost of a Use Permit is currently $2,897. Along with the cost of the permitting process, the approval of a Use Permit adds to the entitlement process time. In addition to the time needed to review the project for compliance at staff level, the project must then be heard by both the Architectural Review Board for a recommendation and the Planning Commission for a decision. Due to the timing of meetings and the requirements of public noticing, this can result in a far lengthier approval process than requiring solely an Architectural Permit (AP). Generally, as more discretionary approvals required, the risk a property owner takes on increases and the less attractive the City looks as a potential development site. Removing the need for a Use Permit eliminates the need for a Planning Commission decision on these projects; however the Planning Commission still retains appeal authority on all Architectural Permits.

The Housing Element recommends that this requirement be removed from the residential zoning districts. In addition to the R-3 and R-4 zones, the requirement for a Use Permit also exists in all commercial and industrial zones within the City.

Policy Direction Sought

If it chooses, the Commission may explore removing the Use Permit requirement from the commercial and industrial zones in addition to the multi-family residential zone.

Staff aims to bring forward an amendment to the Zoning Code to remove the Use Permit requirement for 8 or more units for review by the Planning Commission and subsequent recommendation to Council at the scheduled March meeting.

RESPECTFULLY SUBMITTED:

Alex Othon

Alex Othon, Assistant Planner

Attachments:

1. Housing Element Program 3.3c

Housing Objective: n/a

Program 3.3.b Adequate Sites to Accommodate Housing Needs

In order to ensure that adequate sites are available throughout the planning period to accommodate the City's RHNA, the City will continue to comply with California Government Code §65863 through a project-by-project evaluation.

When water allocations become available for commercial, mixed-use, and residential development, if the ongoing monitoring of development proposals indicates commercial/mixed-use sites are not providing for residential development opportunities as anticipated to address the housing needs for all income levels, the City will develop additional strategies to encourage and facilitate the development of multi-family housing affordable to lower-income households.

Responsible Dept.: Community Development Department - Housing, Planning and Building Divisions
Timeframe: Throughout the planning period
Funding: General Fund
Housing Objective: n/a

Program 3.3.c Use Permit for Multi-Family Development

The City currently has a Use Permit requirement for multi-family developments consisting of eight or more units in the City's multi-family zones (R-3 and R-4). While the City is relying heavily on mixed-use development in commercial zones to accommodate its need for lower-income households, several high-density residential opportunity sites allowing capacity above the seven unit threshold have been identified in the inventory. To ensure the City's permit process is not an unreasonable constraint on the potential development of these sites, the City will process a Zoning Code amendment to eliminate the Use Permit requirement for multi-family developments in the R-3 and R-4 zones.

Responsible Dept.: Community Development Department - Housing, Planning and Building Divisions
Timeframe: Initiate a Code amendment in 2016
Funding: General Fund
Housing Objective: n/a

Policy 3.4 Minimize regulatory constraints on housing development.

Program 3.4.a Parking Standards

The City will review parking requirements and consider options and parking reduction opportunities, such as:

- *Tandem Parking*. Allow for tandem parking for single-family dwellings and individual mobile homes upon meeting appropriate performance criteria.
- *Shared Parking*. Where two or more uses have distinct and differing peak traffic usage periods the required number of parking spaces may be reduced through Use Permit approval.
- *Low Vehicle-Ownership Reduced Parking Requirement*. Allow for a reduction in parking spaces for uses that serve tenants with low vehicle

Item No. 7A

Planning Commission
Annual Report for 2019

CITY OF PACIFIC GROVE

300 Forest Avenue, Pacific Grove, California 93950

AGENDA REPORT

TO:	Members of the Planning Commission
FROM:	Donald Murphy, Chair of the Planning Commission
MEETING DATE:	January 9, 2020
SUBJECT:	Planning Commission Annual Report for 2019
CEQA:	Does not constitute a "Project" under California Environmental Quality Act (CEQA) Guidelines Section 15378

RECOMMENDATION
Receive as information and discuss.

Meetings
The Commission held seventeen (17) scheduled meetings. Eight meetings were cancelled because Planning Department staff did not have items for the Commission to consider. The number of meetings was consistent with meetings held annually during the previous five years: 2018, 16 meetings; 2017, 18 meetings; 2016, 23 meetings; 2015, 21 meetings; and 2014, 15 meetings. The commission held neither special meetings nor joint meetings with the City Council in 2019.

Permits
The Commission considered the following permits:

1. Jan. 17: 935 Jewell Ave., Use Permit, approved
2. March 7: 642 Hillcrest Ave., Use and Administrative Architectural Permits, approved
3. March 21: 550 Central Ave., Architectural Permit; appeal of HRC denial of the permit, denied the appeal
4. March 21: 207 16th St., Use Permit, discussed and continued
5. May 2: 207 16th St., Use Permit, approved
6. Sept 5: 301 Grand Ave., Use and Architectural Permit, denied
7. October 17: 207 Crocker Ave., Architectural Permit, appeal of ARB approval of the permit, denied the appeal

Two Commission decisions were appealed to the City Council: the denial of the Architectural Permit for 550 Central Ave. (the Pacific Grove Public Library remodel) and the denial of the Architectural Permit for housing units at 301 Grand Ave. The City Council reversed the decision of the Commission in both instances.

Zoning Changes
The Commission spent significant time considering zoning issues, including regulations for accessory dwelling units, wireless telecommunications facilities and land subdivision.

1. On June 20, the Commission approved a zoning map amendment for three (3) properties on Piedmont Avenue.
2. On Aug. 8, the Commission forwarded draft amendments to Title 23 and Title 24 of the Pacific Grove Municipal Code (PGMC) regarding subdivision of land to the City Council. The Council adopted the amendments on Sept. 23.
3. On Nov. 7, the Commission approved revisions to Title 23 of the PGMC to cover wireless telecommunications facilities outside the pubic rights-of way. Those revisions and a draft Wireless Design Manual were forwarded to the City Council for approval. The council approved the design manual and a first reading of the ordinance on Dec. 18.
4. On Dec. 19, the Commission recommended approval of prezoning the Mission Linen Property at 801 Sunset Drive.

Presentations
Planning staff provided several thorough presentations on housing issues. Topics included the Housing Element, the City's Housing Rehabilitation Loan Program, density bonus regulations, tools for affordable housing development and accessory dwelling units. Heather Adamson, director of planning at AMBAG, provided a presentation on State and regional housing issues.

Review of the Planning Commission Annual Plan
The Commission did not adopt a formal work plan, but on Dec. 8, 2018, identified twelve items as "topics for consideration or action in 2019." The Commission's success in addressing those items was mixed, at best. Commission agendas were developed in collaboration between the planning director or senior planner and Commission chair.

There are several reasons for the Commission's failure to consider items on the list and those reasons vary from item to item. Not all items matched City Council goals or the city manager's priorities for city staff. Agendas were limited by staff workload constraints.

Below is an evaluation of the Commission's work on the plan items:

1. Construct an annual work plan — Not done
2. Review and revise the city appeal process — Not done
3. Review and revise city parking regulations — Not done
4. Develop, review or revise a wireless communications ordinance for private property and in the public right-of-way — Complete
5. Review the zoning code for validity and appropriateness — Not done
6. Develop affordable housing and an inclusionary housing ordinance — Discussed, but not accomplished
7. Review the subdivision code for the Retreat and Additions to the Retreat and the lack of an appeal process for subdivision decisions — Accomplished, although the revised Title 24 did not change regulations for the Retreat
8. Review the approved uses for the traditional 30' x 60' lots — Under discussion, but no action taken
9. Develop a Downtown Master Plan in the context of business development — Not done
10. Revise the city's lot merger code — Not done
11. Review and participate on the Shoreline Management Plan — The plan is expected to come to the Commission in 2020
12. Periodic review of all major open projects, at least every six month — Not done

Miscellaneous Information
No scheduled meetings were cancelled for lack of a quorum. Commissioner Aeschliman had perfect attendance. No Commissioner had more than three absences. Meetings began at 6. All but four ended before 8 pm. No meeting lasted past 9 pm. The City adopted a new Boards, Committee and Commissions Handbook in March. Starting in September, Commission meetings were live-streamed and shown on local public television. Video recordings are available to the public through the City website. Public attendance has declined since then, although it is not clear that there is a link.
On Dec. 18, the City Council ratified the city manager's decision to change the Commission schedule from two meetings to one meeting a month. On Jan. 17, 2019, the Commission had voted against such a change.

RESPECTFULLY SUBMITTED,

Donald Murphy
Donald Murphy, Chair
Pacific Grove Planning Commission